

# Explosion Proof Protection

## PRODUCT CATALOGUE


### & TECHNICAL BROCHURE

English Version – VER. 201810

Intrinsic Safety Barriers

Temperature Transmitters

Isolator, etc.

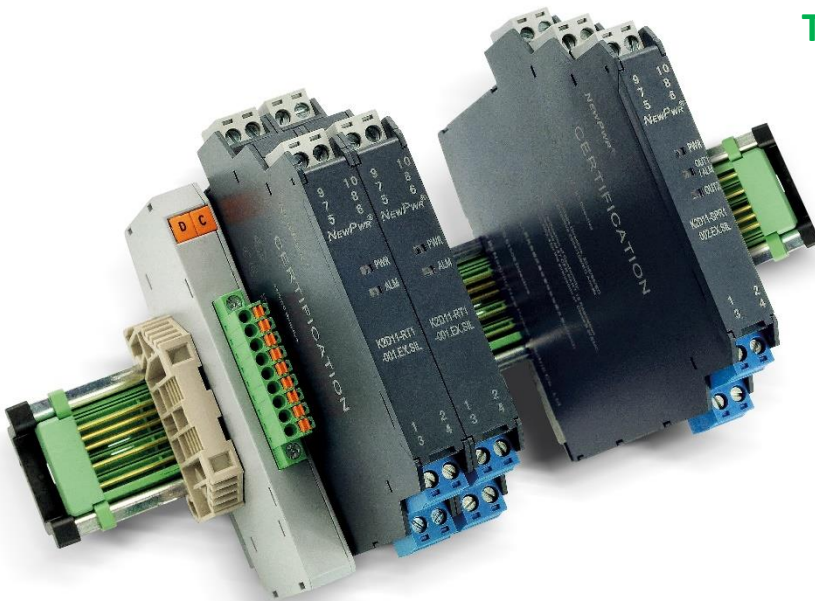

**GB** The National Standards Drafting Unit

 SINOPEC Framework Agreement Unit

 CNOOC Supplier

 China Classification Society Certification

Xi'an Tosilon Automation Co., Ltd

[www.tosilon.com](http://www.tosilon.com)



**Tosilon Automation**

Your Global Partner for Engineering

Leading the Advanced Technology in Ex-Proof Explosion-Proof Protection

Functional Safety Type - Isolated Barriers

**Core Technology**

- Programmable Smart Input
- Proprietary-Special Magnetic Material
- Proprietary-Cold Terminal Compensation
- Proprietary-EMC Device
- Proprietary-Safety Fuse

**Core Technology**

- **Input Type**
  - Thermocouple, Thermal Resistance
  - Current, Transmitter
  - Switch
  - Voltage, Millivolt
  - Resistance (Potentiometer)
  - Frequency
  - Vibration & Strain Bridge
  - Digital Communication
- **Output Type**
  - Current
  - Voltage, Millivolt
  - Resistance
  - Relay
  - Sink / Source
  - Communication
- **Connection Mode**
  - Terminal, Rail, Backplanes
- **Display Mode**
  - LED, LCD



## TOSILON AUTOMATION – NEWPWR

- Intrinsic Safety Barriers National Standard Editorial Unit
- SINOPEC Intrinsic Safety Barriers Framework Agreement Unit
- Through the Integration of the Ministry of Industry & Information Technology



The factory located in Nanjing Luhe Economic and Technology Development Zone, covering an area of 20 acres, with more than 160 employees including about 50 R&D technical engineers, 2 committee members of national standard committee. The company introduces advanced product line and advanced equipment from USA, Germany, England, etc. and has built a complete production management and quality control system.

The International Certificates we have acquired include SIL, ATEX, IECEx, CCS, CE, FCC, etc.

As tier one supplier of Sinopec, CNOOC, and designated supplier of China National Chemical Corporation, we keep long-term supply for our country's major equipment such as military, aerospace and so on. We have formed a huge sales network all over the country. The total sales in 2018 have exceeded 460,000 units and we have become one of the largest scale companies in the field of industrial instrument in China.



## C Series Isolated Safety Barriers

### RTD, TC

NPEXA-C01 / NPEXA-C01PB (1-Channel, Output: 4~20mA)  
NPEXA-C011 / NPEXA-C011PB (1-Channel, Output: 4~20mA)  
NPEXA-C0D11 / NPEXA-C0D11PB (2-Channel, Output: 4~20mA)  
NPEXA-C0T1 / NPEXA-C0T1PB (1-Channel, Output: 4~20mA, RS-485)  
NPEXA-C01L (1-Channel, Output: 4~20mA, Loop Powered)  
NPEXA-K01 (1-Channel, Output: 4~20mA)

### TC

NPEXA-C11 / NPEXA-C11PB (1-Channel, Output: 4~20mA)  
NPEXA-C111 / NPEXA-C111PB (1-Channel, Output: 4~20mA)  
NPEXA-C1D11 / NPEXA-C1D11PB (2-Channel, Output: 4~20mA)  
NPEXA-C17 / NPEXA-C17PB (1-Channel, Output: 1:1mV)  
NPEXA-C177 / NPEXA-C177PB (1-Channel, Output: 1:1mV)  
NPEXA-C171 (1-Channel, Output: 1:1mV, 4~20mA)  
NPEXA-C11T1 / NPEXA-C11T1PB (1-Channel, Output: 4~20mA, RS-485)  
NPEXA-C11L (1-Channel, Output: 4~20mA, Loop Powered)

### RTD

NPEXA-C21 / NPEXA-C21PB (1-Channel, Output: 4~20mA)  
NPEXA-C211 / NPEXA-C211PB (1-Channel, Output: 4~20mA)  
NPEXA-C2D11 / NPEXA-C2D11PB (2-Channel, Output: 4~20mA)  
NPEXA-C27 / NPEXA-C27PB (1-Channel, Output: 1:1 Resistance)  
NPEXA-C277 / NPEXA-C277PB (1-Channel, Output: 1:1 Resistance)  
NPEXA-C271 / NPEXA-C271PB (1-Channel, Output: 1:1 Resistance, 4~20mA)  
NPEXA-C21T1 / NPEXA-C21T1PB (1-Channel, Output: 4~20mA, RS-485)  
NPEXA-C21L (1-Channel, Output: 4~20mA, Loop Powered)

### AI

NPEXA-CM31 / NPEXA-CM31PB (1-Channel, Output: 4~20mA, HART)  
NPEXA-CM311 / NPEXA-CM311PB (1-Channel, Output: 4~20mA, HART)  
NPEXA-CM3D11 / NPEXA-CM3D11PB (2-Channel, Output: 4~20mA, HART)  
NPEXA-CM31S1S / NPEXA-CM31S1SPB (1-Channel, Output: 4~20mA, HART)  
NPEXA-C31T1 / NPEXA-C31T1PB (1-Channel, Output: 4~20mA, RS-485)  
NPEXA-CM31L (1-Channel, Output: 4~20mA, Loop Powered)  
NPEXA-KM31 (1-Channel, Output: 4~20mA)

### AO

NPEXB-KM31 (1-Channel, Output: 4~20mA)  
NPEXB-CM3D11 / NPEXB-CM3D11PB (2-Channel, Output: 4~20mA, HART)  
NPEXB-CM31L (1-Channel, Output: 4~20mA, Loop Powered)

## AI (Voltage)

NPEXA-CM41 / NPEXA-CM41PB (1-Channel, Output: 4~20mA)

NPEXA-CM411 / NPEXA-CM411PB (1-Channel, Output: 4~20mA)

## DI

NPEXA-K51 (1-Channel, Output: Relay)

NPEXA-K511 (1-Channel, Output: Relay)

NPEXA-K5D11 (2-Channel, Output: Relay)

NPEXA-C512 / NPEXA-C512PB (1-Channel, Output: Transistor)

NPEXA-C5122 / NPEXA-C5122PB (1-Channel, Output: Transistor)

NPEXA-C5D122 / NPEXA-C5D122PB (2-Channel, Output: Transistor)

## DO

NPEXB-C512 / NPEXB-C512PB (1-Channel, Output: 45mA)

NPEXB-C5D12 / NPEXB-C5D12PB (2-Channel, Output: 45mA)

NPEXB-C512L (1-Channel, Output: 45mA, Loop Powered)

NPEXB-C5D12L (2-Channel, Output: 45mA, Loop Powered)

NPEXB-K512L (1-Channel, Output: 45mA, Loop Powered)

## Frequency

NPEXA-C61P1 / NPEXA-C61P1PB (1-Channel, Output: 4~20mA)

NPEXA-C611P1 / NPEXA-C611P1PB (1-Channel, Output: 4~20mA)

NPEXA-C61P2 / NPEXA-C61P2PB (1-Channel, Output: 4~20mA)

NPEXA-C611P2 / NPEXA-C611P2PB (1-Channel, Output: 4~20mA)

NPEXA-C67P1 / NPEXA-C67P1PB (1-Channel, Output: Transistor)

NPEXA-C677P1 / NPEXA-C677P1PB (1-Channel, Output: Transistor)

NPEXA-C67P2 / NPEXA-C67P2PB (1-Channel, Output: Transistor)

NPEXA-C677P2 / NPEXA-C677P2PB (1-Channel, Output: Transistor)

## RS-485

NPEXA-C711 (Input: RS-485, Output: RS-485)

## Note

When selecting DIN Rail Power Supply Product, PB should be mentioned after the corresponding model.

For example: NPEXA-CM31PB



## IECEx Quality Assessment Report

INTERNATIONAL ELECTROTECHNICAL COMMISSION

IEC SCHEME FOR CERTIFICATION TO STANDARDS FOR SAFETY OF ELECTRICAL EQUIPMENT FOR EXPLOSIVE ATMOSPHERES (IECEx-System)

---

**Report No** : DE/TUR/QAR/16.0006/00

**Date of Issue** : 2016-02-10

**Valid until** : 2019-01-06


**Product Category** : Isolated safety barriers

**Applicant** : Nanjing New Power Electric Co.,Ltd.

**Manufacturing Locations** : Luhe Economic Development Zone, Nanjing City Jiangsu Province, China 211500

**Approved for issue on behalf of the IECEx Certification Body** : Andreas Maschke

**Position** : Head of Certification Body

**Signature** : 

**Date** : 2016-02-10

---

Quality Report issued by:

TÜV Rheinland Industrie Service GmbH  
Am Grauen Stein  
51105 Köln

 **TÜVRheinland**<sup>®</sup>  
Precisely Right.

## (1) EC TYPE-EXAMINATION CERTIFICATE



- (2) Equipment and Protective Systems intended for use in Potentially Explosive Atmosphere - **Directive 94/9/EC**
- (3) EC Type-Examination Certificate Number

### TÜV 15 ATEX 7594 X

- (4) **Equipment:** K-type RTD Input Isolated Safety Barrier / NPEXA-KM21
- (5) **Manufacturer:** Nanjing New Power Electric Co.,Ltd.
- (6) **Address:** New Power Industrial Park, Luhe Economic Development Zone, Nanjing, Jiangsu Province 211500, China

- (7) This equipment and any acceptable variation thereto are specified in the schedule to this certificate and the documents therein referred to.
- (8) The TÜV Rheinland Zertifizierungsstelle for ex-protected products of TÜV Rheinland Industrie Service GmbH, Notified Body No. 0035 in accordance with Article 9 of the Council Directive 94/9/EC of 23 March 1994, certifies this equipment has been found to comply with the Essential Health and Safety Requirements relating to the design and construction of equipment and protective systems intended for use in potentially explosive atmosphere, given in Annex II to the Directive.

The examination and test results are recorded in the confidential report GC / Ex 7594.00 / 15.

- (9) Compliance with the Essential Health and Safety Requirements, with the exception of those listed in the schedule of this certificate, has been assessed by reference to:

**EN 60079-0: 2012                      EN 60079-11: 2012**

except the requirements, which are listed under item (18).

- (10) If the sign "X" is placed after the certificate number, it indicates that the equipment is subject to special conditions for safe use specified in the schedule to this certificate.
- (11) This EC-Type-Examination Certificate relates only to the design and specification for construction of the equipment or protective system. It does not cover the process for actual manufacture or supply of the equipment or protective system, for which further requirements of the directive are applicable.
- (12) The marking of the equipment shall include the following:



**II (1) G [Ex ia Ga] IIC**

TÜV Rheinland ExNB for explosion protected equipment

Cologne, 2016-04-19

Dipl.-Ing. Klauspeter Graffi

This EC-Type-Examination Certificate without signature and stamp shall not be valid.  
This EC-Type-Examination Certificate may be circulated only without alteration. Extracts or alterations are subject to approval by the TÜV Rheinland Notified Body of TÜV Rheinland Industrie Service GmbH, Am Grauen Stein 51105 Köln  
Tel. +49 (0) 221 806-0 Fax. + 49 (0) 221 806 114



# IECEX Certificate of Conformity

## INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification Scheme for Explosive Atmospheres

for rules and details of the IECEx Scheme visit [www.iecex.com](http://www.iecex.com)

Certificate No.: IECEx TUR 16.0003X Issue No: 0 Certificate history:  
Issue No. 0 (2016-04-21)

Status: **Current** Page 1 of 3

Date of Issue: **2016-04-21**

Applicant: **Nanjing New Power Electric Co., Ltd**  
New Power Industrial Park, Luhe Economic Development Zone,  
Nanjing, Jiangsu Province 211500  
China

Electrical Apparatus: **K-type RTD Input Isolated Safety Barrier**  
*Optional accessory:* **NPEXA-KM21**

Type of Protection: **Ex i**

Marking: **[Ex ia Ga] IIC**

*Approved for issue on behalf of the IECEx  
Certification Body:*

Dipl.-Ing. Klauspeter Graffi

*Position:*

Head of Certification Body

*Signature:  
(for printed version)*

*Date:*

2016-04-21

1. This certificate and schedule may only be reproduced in full.
2. This certificate is not transferable and remains the property of the issuing body.
3. The Status and authenticity of this certificate may be verified by visiting the [Official IECEx Website](http://www.iecex.com).

Certificate issued by:

**TUV Rheinland Industrie Service GmbH**  
Am Grauen Stein  
51105 Cologne  
Germany



## (1) EU TYPE-EXAMINATION CERTIFICATE



- (2) Equipment and Protective Systems intended for use in Potentially Explosive Atmosphere - **Directive 14/34/EU**
- (3) EC Type-Examination Certificate Number

**TÜV 15 ATEX 7628 X**

Issue: 00

- (4) Equipment: **Current Input Isolated Safety barrier type NPEXA-KM31**
- (5) Manufacturer: **Nanjing New Power Electric Co.,Ltd.**
- (6) Address: **New Power Industrial Park, Luhe Economic Development Zone, Nanjing, Jiangsu Province 211500, China**
- (7) This product and any acceptable variation thereto are specified in the schedule to this certificate and the documents therein referred to.
- (8) The TÜV Rheinland Zertifizierungsstelle for ex-protected products of TÜV Rheinland Industrie Service GmbH, Notified Body No. 0035 in accordance with Article 21 of the Council Directive 14/34/EU of 26<sup>th</sup> February 1986, certifies this equipment has been found to comply with the Essential Health and Safety Requirements relating to the design and construction of equipment and protective systems intended for use in potentially explosive atmosphere, given in Annex II to the Directive.

The examination and test results are recorded in the confidential report GC / Ex 7628.00 / 15 Compliance with the Essential Health and Safety Requirements, with the exception of those listed in the schedule of this certificate, has been assessed by reference to:

**EN 60079-0: 2012**

**EN 60079-11: 2012**

- (10) If the sign "X" is placed after the certificate number, it indicates that the equipment is subject to special conditions for safe use specified in the schedule to this certificate.
- (11) This Type-Examination Certificate relates only to the design and specification for construction of the equipment or protective system. It does not cover the process for actual manufacture or supply of the equipment or protective system, for which further requirements of the directive are applicable.



**II (1) G [Ex ia Ga] IIC**

TÜV Rheinland ExNB for explosion protected equipment

Cologne, 2016-07-14

Dipl.-Ing. Klaus Peter Graff



This EU Type-Examination Certificate without signature and stamp shall not be valid.  
This Type-Examination Certificate may be circulated only without alteration. Extracts or alterations are subject to approval by the TÜV Rheinland Industrie Service GmbH TÜV Rheinland Group Am Grauen Stein 51105 Köln  
Tel. +49 (0) 221 806-0 Fax. + 49 (0) 221 806 114



# IECEX Certificate of Conformity

## INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification Scheme for Explosive Atmospheres

for rules and details of the IECEx Scheme visit [www.iecex.com](http://www.iecex.com)

Certificate No.: IECEx TUR 16.0004X Issue No: 0 Certificate history:  
Issue No. 0 (2016-07-14)

Status: **Current** Page 1 of 3

Date of Issue: **2016-07-14**

Applicant: **Nanjing New Power Electric Co., Ltd.**  
New Power Industrial Park, Nanjing, Jiangsu Province 211500  
China

Equipment: **Current Input Isolated Safety barrier type NPEXA-KM31**  
*Optional accessory:*

Type of Protection: **Ex i - Intrinsic Safety**

Marking: [Ex ia Ga] IIC

*Approved for issue on behalf of the IECEx  
Certification Body:*

Klauspeter Graffi

*Position:*

Head of Certification Body

*Signature:  
(for printed version)*

*Date:*

2016-07-14

1. This certificate and schedule may only be reproduced in full.
2. This certificate is not transferable and remains the property of the issuing body.
3. The Status and authenticity of this certificate may be verified by visiting the [Official IECEx Website](http://www.iecex.com).

Certificate issued by:

**TUV Rheinland Industrie Service GmbH**  
Am Grauen Stein  
51105 Cologne  
Germany



## (1) EU TYPE-EXAMINATION CERTIFICATE



- (2) Equipment and Protective Systems intended for use in Potentially Explosive Atmosphere - **Directive 14/34/EU**
- (3) EC Type-Examination Certificate Number

**TÜV 15 ATEX 7629 X**

Issue: 00

- (4) Equipment: **Current Output Isolated Safety barrier type NPEXB-KM31**
- (5) Manufacturer: **Nanjing New Power Electric Co.,Ltd.**
- (6) Address: **New Power Industrial Park, Luhe Economic Development Zone, Nanjing, Jiangsu Province 211500, China**
- (7) This product and any acceptable variation thereto are specified in the schedule to this certificate and the documents therein referred to.
- (8) The TÜV Rheinland Zertifizierungsstelle for ex-protected products of TÜV Rheinland Industrie Service GmbH, Notified Body No. 0035 in accordance with Article 21 of the Council Directive 14/34/EU of 26<sup>th</sup> February 2014, certifies this equipment has been found to comply with the Essential Health and Safety Requirements relating to the design and construction of equipment and protective systems intended for use in potentially explosive atmosphere, given in Annex II to the Directive.

The examination and test results are recorded in the confidential report GC / Ex 7629.00 / 15 Compliance with the Essential Health and Safety Requirements, with the exception of those listed in the schedule of this certificate, has been assessed by reference to:

**EN 60079-0: 2012**

**EN 60079-11: 2012**

- (10) If the sign "X" is placed after the certificate number, it indicates that the equipment is subject to special conditions for safe use specified in the schedule to this certificate.
- (11) This Type-Examination Certificate relates only to the design and specification for construction of the equipment or protective system. It does not cover the process for actual manufacture or supply of the equipment or protective system, for which further requirements of the directive are applicable.



**II (1) G [Ex ia Ga] IIC**

TÜV Rheinland ExNB for explosion protected equipment

Cologne, 2016-07-14

Dipl.-Ing. Klaus Peter Graffi



This EU Type-Examination Certificate without signature and stamp shall not be valid.  
This Type-Examination Certificate may be circulated only without alteration. Extracts or alterations are subject to approval by the TÜV Rheinland Industrie Service GmbH TÜV Rheinland Group Am Grauen Stein 51105 Köln  
Tel. +49 (0) 221 806-0 Fax. + 49 (0) 221 806 114



# IECEX Certificate of Conformity

## INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification Scheme for Explosive Atmospheres

for rules and details of the IECEx Scheme visit [www.iecex.com](http://www.iecex.com)

Certificate No.: IECEx TUR 16.0005X Issue No: 0 Certificate history:  
Status: Current Page 1 of 3 Issue No. 0 (2016-07-14)  
Date of Issue: 2016-07-14  
Applicant: Nanjing New Power Electric Co., Ltd.  
New Power Industrial Park, Nanjing, Jiangsu Province 211500  
China  
Equipment: Current Output Isolated Safety barrier type NPEXB-KM31  
*Optional accessory:*  
Type of Protection: Ex i - Intrinsic Safety  
Marking: [Ex ia Ga] IIC

Approved for issue on behalf of the IECEx  
Certification Body:

Klauspeter Graffi

Position:

Head of Certification Body

Signature:  
(for printed version)

Date:

2016-07-14

1. This certificate and schedule may only be reproduced in full.
2. This certificate is not transferable and remains the property of the issuing body.
3. The Status and authenticity of this certificate may be verified by visiting the [Official IECEx Website](http://www.iecex.com).

Certificate issued by:

TUV Rheinland Industrie Service GmbH  
Am Grauen Stein  
51105 Cologne  
Germany



## (1) EU TYPE-EXAMINATION CERTIFICATE



- (2) Equipment and Protective Systems intended for use in Potentially Explosive Atmosphere - **Directive 2014/34/EU**
- (3) EC Type-Examination Certificate Number

**TÜV 16 ATEX 7981**

Issue: 00

- (4) Equipment: **Digital output isolated safety barrier K series (NPEXB-K511L, NPEXB-K512L)**
- (5) Manufacturer: **Nanjing New Power Electric Co.,Ltd.**
- (6) Address: **New Power Industrial Park, Luhe Economic Development Zone, Nanjing, Jiangsu Province 211500, China**
- (7) This product and any acceptable variation thereto are specified in the schedule to this certificate and the documents therein referred to.
- (8) The TÜV Rheinland Zertifizierungsstelle for ex-protected products of TÜV Rheinland Industrie Service GmbH, Notified Body No. 0035 in accordance with Article 21 of the Council Directive 2014/34/EU of 26<sup>th</sup> February 2014, certifies this equipment has been found to comply with the Essential Health and Safety Requirements relating to the design and construction of equipment and protective systems intended for use in potentially explosive atmosphere, given in Annex II to the Directive.

The examination and test results are recorded in the confidential report GC / Ex 7981.00 / 16 Compliance with the Essential Health and Safety Requirements, with the exception of those listed in the schedule of this certificate, has been assessed by reference to:

**EN 60079-0:2012 + A11:2013**

**EN 60079-11: 2012**

- (10) If the sign "X" is placed after the certificate number, it indicates that the equipment is subject to special conditions for safe use specified in the schedule to this certificate.
- (11) This Type-Examination Certificate relates only to the design and specification for construction of the equipment or protective system. It does not cover the process for actual manufacture or supply of the equipment or protective system, for which further requirements of the directive are applicable.



**II (1) G [Ex ia Ga] IIC (-20°C ≤ Ta ≤ +60°C)**

TÜV Rheinland ExNB for explosion protected equipment

Cologne, 2017-06-26

Dipl.-Ing. Andreas Maschke



This EU Type-Examination Certificate without signature and stamp shall not be valid.  
This Type-examination Certificate may be circulated only without alteration. Extracts or alterations are subject to approval by the TÜV Rheinland Industrie Service GmbH TÜV Rheinland Group Am Grauen Stein 51105 Köln  
Tel. +49 (0) 221 806-0 Fax. + 49 (0) 221 806 114



# IECEX Certificate of Conformity

## INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification Scheme for Explosive Atmospheres

for rules and details of the IECEx Scheme visit [www.iecex.com](http://www.iecex.com)

Certificate No.: IECEx TUR 16.0059 Issue No: 0 Certificate history:  
Issue No. 0 (2017-06-26)

Status: Current Page 1 of 4

Date of Issue: 2017-06-26

Applicant: Nanjing New Power Electric CO., LTD.  
New Power Industrial Park, Luhe Economic Development Zone, Nanjing, Jiangsu  
Province 211500  
China

Equipment: K-series Digital output isolated safety barrier  
Optional accessory:

Type of Protection: [Ex ia Ga] IIC

Marking: [Ex ia Ga] IIC


Approved for issue on behalf of the IECEx  
Certification Body:

Andreas Maschke

Position:

Deputy Head of Certification Body

Signature:  
(for printed version)

  
2017-06-26

Date:

1. This certificate and schedule may only be reproduced in full.
2. This certificate is not transferable and remains the property of the issuing body.
3. The Status and authenticity of this certificate may be verified by visiting the [Official IECEx Website](http://www.iecex.com).

Certificate issued by:

TUV Rheinland Industrie Service GmbH  
Am Grauen Stein  
51105 Cologne  
Germany



## (1) EU TYPE-EXAMINATION CERTIFICATE



- (2) Equipment and Protective Systems intended for use in Potentially Explosive Atmosphere - **Directive 14/34/EU**
- (3) EC Type-Examination Certificate Number

**TÜV 16 ATEX 7982**

Issue: 00

- (4) Equipment: **Switch input isolated safety barrier K series (NPEXA-K51, NPEXA-K511, NPEXA-K5D11)**
- (5) Manufacturer: **Nanjing New Power Electric Co.,Ltd.**
- (6) Address: **New Power Industrial Park, Luhe Economic Development Zone, Nanjing, Jiangsu Province 211500, China**
- (7) This product and any acceptable variation thereto are specified in the schedule to this certificate and the documents therein referred to.
- (8) The TÜV Rheinland Zertifizierungsstelle for ex-protected products of TÜV Rheinland Industrie Service GmbH, Notified Body No. 0035 in accordance with Article 21 of the Council Directive 14/34/EU of 26<sup>th</sup> February 2014, certifies this equipment has been found to comply with the Essential Health and Safety Requirements relating to the design and construction of equipment and protective systems intended for use in potentially explosive atmosphere, given in Annex II to the Directive.  
  
The examination and test results are recorded in the confidential report GC / Ex 7982.00 / 16 Compliance with the Essential Health and Safety Requirements, with the exception of those listed in the schedule of this certificate, has been assessed by reference to:  
  
**EN 60079-0:2012 + A11:2013                      EN 60079-11: 2012**
- (10) If the sign "X" is placed after the certificate number, it indicates that the equipment is subject to special conditions for safe use specified in the schedule to this certificate.
- (11) This Type-Examination Certificate relates only to the design and specification for construction of the equipment or protective system. It does not cover the process for actual manufacture or supply of the equipment or protective system, for which further requirements of the directive are applicable.



**II (1) G [Ex ia Ga] IIC (-20°C ≤ Ta ≤ +60°C)**

TÜV Rheinland ExNB for explosion protected equipment

Cologne, 2017-06-20

Dipl.-Ing. Klauspeter Graff

This EU Type-Examination Certificate without signature and stamp shall not be valid.  
This Type-examination Certificate may be circulated only without alteration. Extracts or alterations are subject to approval by the TÜV Rheinland Industrie Service GmbH TÜV Rheinland Group Am Grauen Stein 51105 Köln  
Tel. +49 (0) 221 806-0 Fax. + 49 (0) 221 806 114

www.tuv.com



# Certificate



Product Safety  
Functional  
Safety

www.tuv.com  
ID 060000000

**No.: 968/FSP 1171.00/15**

<b>Product tested</b>	Isolated Barriers for safety-related applications	<b>Certificate holder</b>	Nanjing New Power Electric Co., Ltd. Liuhe Economic Development Zone 211500 Nanjing, Jiangsu province P.R.China
<b>Type designation</b>	NPEXA-KM31,NPEXB-KM31		
<b>Codes and standards</b>	IEC 61508 Parts 1-7:2010 IEC 61298 Parts 1-3:2008	IEC 61326-3-1:2008	
<b>Intended application</b>	<p>NPEXA-KM31,NPEXB-KM31 are intended to be used in safety-related applications and have the safety function of repeating 4~20 mA current within the accuracy of <math>\pm 2\%</math>. In case of a failure the output current is:</p> <ul style="list-style-type: none"> <li>- NPEXA-KM31: &lt;3.6 mA or &gt; 21.5 mA</li> <li>- NPEXB-KM31: &lt;3.6 mA</li> </ul> <p>The barriers comply with the requirements of IEC 61508: NPEXA-KM31: IEC 61508 SC 3, SIL 3 NPEXB-KM31: IEC 61508 SC 3, SIL 2</p>		
<b>Specific requirements</b>	The instructions of the associated Safety Manuals, the Installation and Operating Manuals shall be considered.		
<b>Valid until</b>	2020-09-09		

The issue of this certificate is based upon an examination, whose results are documented in Report No. 968/FSP 1171.00/15 dated 2015-09-09.  
This certificate is valid only for products which are identical with the product tested. It becomes invalid at any change of the codes and standards forming the basis of testing for the intended application.

**TÜV Rheinland Industrie Service GmbH**  
Bereich Automation  
Funktionale Sicherheit  
Am Grauen Stein, 51105 Köln  
Certification Body for FS-Products

*H. Gall*  
Dipl.-Ing. Heinz Gall

Köln, 2015-09-09

www.fs-products.com  
www.tuv.com

 **TÜVRheinland®**  
Precisely Right.



# FCC VERIFICATION OF CONFORMITY

BST09070590810C-3



We herewith confirm the following designated product:

**NP SERIES MODULE INSTRUMENTS**  
**MODEL NO.: NPEX, NPPD, NPWD, NPGL**  
(Product Identification)

has been tested and found in compliance with the requirements of 47 CFR PART 15 regulation & ANSI C63.4 for the evaluation of Class B of electromagnetic compatibility. It is only valid in connection with the test report number: BST09070590810R-3.

This device complies with Part 15 of the FCC rules, operation is subject to the following two conditions:


- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

(Identification of regulations/standards)

This declaration is the responsibility of the manufacturer/importer

**NANJING NEW POWER ELECTRIC CO.,LTD.**  
**Daxinggong Mansion 5F, No.147 East Zhongshan Road, Nanjing, China**  
(Name /Address)

### MANUFACTURER / IMPORTER



(Name)

(Date)

### TEST LABORATORY

This is the results of test that was carried out by Shenzhen BST. from the submitted type samples of the product is in conformity with the specification of the respective standards.

The certificate holder has the right to fix the FCC-mark on the product complying with the required rules.



Jul. 10, 2009

**Shenzhen BST Technology Co.,Ltd.**

3F, Weames Technology Building, No. 10 Kefa Road, Science Park, Nanshan District, Shenzhen, Guangdong, China

<http://www.bst-lab.com>



# Reference List

- Intrinsic Safety Barriers National Standard Editorial Unit
- SINOPEC Intrinsic Safety Barriers Framework Agreement Unit
- Through the Integration of the Ministry of Industry & Information Technology



Project Name	Product Name	Model & Technical Performance		Quantity	Date
The co-generation project of the Yangzi Petrochemical - Thermal Power Plant	Signal Isolator	NPPD-CM11D	4~20mA input, 4~20mA output	★★★★★	March, 2012
Ash Free Dispersing Device Yangzi Petrochemical Plant	Temperature Transmitter	NPWE-C11D	TC / RTD input, 4~20mA output	★★★★★	March, 2013
The Particle Project of the Yangzi Petrochemical Plastic Factory	Intrinsic Safety Barriers	NPEXA-CM31	4~20mA input, 4~20mA output	★★★	March, 2013
Expansion Project of Yangzi Petrochemical Aromatics Plant	Intrinsic Safety Barriers	NPEXB-CM31	4~20mA input, 4~20mA output, AO	★★★★★	Apr, 2013
	Intrinsic Safety Barriers	NPEXA-CM311	4~20mA input, Two 4~20mA output		
	Intrinsic Safety Barriers	NPEXB-CM31	4~20mA input, 4~20mA output, AO		
Residue Hydro-treating Project of the Yangzi Petrochemical Refinery	Intrinsic Safety Barriers	NPEXA-CM31	4~20mA input, 4~20mA output	★★	June, 2013
	Intrinsic Safety Barriers	NPEXA-C5D11	Relay input, Relay output, dual channel		
	Intrinsic Safety Barriers	NPEXA-CM31	4~20mA input, 4~20mA output		
Yangzi Fine Chemical Carbone Nine Deep Processing Project	Intrinsic Safety Barriers	NPEXA-CM31	4~20mA input, 4~20mA output	★★★	Sep, 2013
	Intrinsic Safety Barriers	NPEXA-C11	TC input, 4~20mA output		
	Intrinsic Safety Barriers	NPEXA-C21	RTD input, 4~20mA output		
Water Cycle Project of Yangzi Petrochemical Aromatics Plant	Intrinsic Safety Barriers	NPEXA-CM31	4~20mA input, 4~20mA output	★★★★★	June, 2014
	Intrinsic Safety Barriers	NPEXB-CM31	4~20mA input, 4~20mA output, AO		
	Intrinsic Safety Barriers	NPEXA-C11	TC input, 4~20mA output		
Transformation of SIS System of Yangzi Petrochemical & Logistics Department	Intrinsic Safety Barriers	NPEXA-C21	RTD input, 4~20mA output	★★	Nov, 2014
	Intrinsic Safety Barriers	NPEXA-CM31	4~20mA input, 4~20mA output		
	Intrinsic Safety Barriers	NPEXA-CM31	4~20mA input, 4~20mA output		
Jinling Petrochemical Alkylation Project	Intrinsic Safety Barriers	NPEXA-CM31	4~20mA input, 4~20mA output	★★	June, 2014
1000 tons Polythene Project of Sinopec Yizheng Chemical Fiber	Intrinsic Safety Barriers	NPEXA-C11	TC input, 4~20mA output	★★★★★	May, 2012
	Intrinsic Safety Barriers	NPEXA-C21	RTD input, 4~20mA output		
	Intrinsic Safety Barriers	NPEXA-CM31	4~20mA input, 4~20mA output		
Relocation & Transformation of Sinopec Yizheng Chemical Fiber Polyester Staple Fiber Production Line	Intrinsic Safety Barriers	NPEXB-CM31	4~20mA input, 4~20mA output, AO	★★★★★	Nov, 2012
	Intrinsic Safety Barriers	NPEXA-C11	TC input, 4~20mA output		
	Intrinsic Safety Barriers	NPEXA-C21	RTD input, 4~20mA output		
Small Project of Sinopec Changline Refining& Chemical Modification	Intrinsic Safety Barriers	NPEXA-CM31	4~20mA input, 4~20mA output	★★	June, 2012
	Intrinsic Safety Barriers	NPFL-3MSD241	4~20mA input, 4~20mA output		
	Intrinsic Safety Barriers	NPEXA-CM31	4~20mA input, 4~20mA output		
No.2 Gas Division Maintenance Project of Sinopec Wuhan Branch	Intrinsic Safety Barriers	NPEXA-C11	TC input, 4~20mA output	★★	Sep, 2012
	Intrinsic Safety Barriers	NPEXA-C21	RTD input, 4~20mA output		
	Intrinsic Safety Barriers	NPEXA-C21	RTD input, 4~20mA output		
Sinopec Tahe Refining & Chemical Heavy Oil Upgrading Project	Intrinsic Safety Barriers	NPEXA-C21	RTD input, 4~20mA output	★★	Dec, 2012
	Intrinsic Safety Barriers	NPEXA-CM311	4~20mA input, Two 4~20mA output		
	Intrinsic Safety Barriers	NPEXA-C21	RTD input, 4~20mA output		
200k Tons Ethylene Glycol Project of Sinopec Hubei Chemical Fertilizer Plant	Intrinsic Safety Barriers	NPEXB-CM31	4~20mA input, 4~20mA output, AO	★★★	Feb, 2013
	Intrinsic Safety Barriers	NPEXA-CM311	4~20mA input, Two 4~20mA output		
	Intrinsic Safety Barriers	NPEXA-C11	TC input, 4~20mA output		
5 Transformation of Sinopec Puyang Zhongyuan Oil Field	Intrinsic Safety Barriers	NPEXA-C21	RTD input, 4~20mA output	★★★	Apr, 2014
	Intrinsic Safety Barriers	NPEXA-C511	Relay Input, Relay Output		
	Intrinsic Safety Barriers	NPEXA-CM311	4~20mA input, Two 4~20mA output		
Metrology & Dispatching Transformation of Sinopec Shengli Oilfield	Intrinsic Safety Barriers	NPEXA-C511	Relay Input, Relay Output	★★★	Aug, 2014
	Intrinsic Safety Barriers	NPEXA-CM31	4~20mA input, 4~20mA output		

Project Name	Product Name	Model & Technical Performance	Quantity	Date
Sinopec Shengli Oilfield Linpan a First Station to Linyi Oil Station Pipeline	Intrinsic Safety Barriers	NPEXA-C511 Relay Input, Relay Output	★★★★	Jan, 2016
	Intrinsic Safety Barriers	NPEXA-C711 RS485 Input, RS485 Output		
100k Ton/Year Propylene & Associated Aromatic Hydrocarbon, 3m Ton/Year Fuel Oil Pretreatment & 600k Ton / Year Aromatics Hydrogenation in Henan Feng Li Petrochemical	Signal Isolators	NPPD-CM11D 4~20mA input, 4~20mA output	★★★★★	June, 2015
	Intrinsic Safety Barriers	NPEXA-CM31 4~20mA input, 4~20mA output		
	Intrinsic Safety Barriers	NPEXB-CM31 4~20mA input, 4~20mA output, AO		
	Signal Isolators	NPGL-CM11D 4~20mA input, 4~20mA output		
2m Ton / Year Heavy Oil Catalytic Cracking Unit of Hualian Petrochemical Company, Dongying	Intrinsic Safety Barriers	NPEXA-CM311 4~20mA input, Two 4~20mA output	★★★★★	June, 2015
	Intrinsic Safety Barriers	NPEXA-C111 TC input, Two 4~20mA output		
	Intrinsic Safety Barriers	NPEXA-CM31H 4~20mA input, 4~20mA output, via HART		
	Intrinsic Safety Barriers	NPEXA-C11 TC input, 4~20mA output		
1 Million 600 Thousand Ton / Year Heavy Oil Catalytic Cracking Project in Hebei Shallow Sea, 50k Ton / Year MTBE & Desulphurization Unit	Intrinsic Safety Barriers	NPEXA-CM31 4~20mA input, 4~20mA output	★★★★	July, 2015
	Intrinsic Safety Barriers	NPEXB-CM31 4~20mA input, 4~20mA output, AO		
	Intrinsic Safety Barriers	NPEXA-C11 TC input, 4~20mA output		
	Intrinsic Safety Barriers	NPEXA-CM31H 4~20mA input, 4~20mA output, via HART		
120k Ton Olefin Project of Dongming Petrochemical Group, Shandong	Intrinsic Safety Barriers	NPEXB-CM31H 4~20mA input, 4~20mA output, via HART, AO	★★★★★	July, 2016
	Intrinsic Safety Barriers	NPEXA-C21 RTD input, 4~20mA output		
	Intrinsic Safety Barriers	NPEXA-C11 TC input, 4~20mA output		
	Intrinsic Safety Barriers	NPEXA-CM311H 4~20mA input, Two 4~20mA output, via HART		
Comprehensive Utilization of 1 Million 800k Ton / Year of Shandong Shida Shenghua Inferior Oil & Ancillary Works	Signal Isolators	NPGL-C11D 4~20mA input, 4~20mA Output	★★★★★	May, 2017
	Intrinsic Safety Barriers	NPEXA-CM31 4~20mA input, 4~20mA output		
	Intrinsic Safety Barriers	NPEXA-C21 RTD input, 4~20mA output		
	Intrinsic Safety Barriers	NPEXB-CM31 4~20mA input, 4~20mA output, AO		
	Intrinsic Safety Barriers	NPEXA-C11 TC input, 4~20mA output		

- ★★ - Less than 500 pieces
- ★★★ - 500~1000 pieces
- ★★★★ - 1000~2000 pieces
- ★★★★★ - more than 2000 pieces

Note:  
This Reference List is only part of the typical performance of the petroleum & petrochemical industry. Over the past 3 years, we have more than 80 projects in the petroleum and petrochemical industry been purchased by owners or third parties such as Yokogawa, Siemens, Supcon, Hollysys System Integrators.

# PERFORMANCE

Over the past 3 years, the total volume of Intrinsic Safety Barriers, Signal Isolators and Surge Protective Device supplied to the oil & petrochemical industry exceed 150,000.00 units



# TC & RTD Isolated Safety Barrier

## NPEXA-C01

Single Input, Single Output

## NPEXA-C011

Single Input, Double Output

Input: TC, RTD

Output: 4~20mA


Temperature Input Safety Barrier, it converts the thermocouple or thermal resistance signals from a hazardous area into current signals to a safe area by isolation. It has external cold junction compensation terminals. It needs an independent power supply. The input, output and power supply are galvanically isolated from each other. A self-test feature is also available on this device. The PC or Handheld Programmer could be adopted for parameters-modification.

### Parameters


Power Supply	18V DC~60V DC (Reverse Power Protection)
Power Dissipation	0.8W (Single Output); 1.2W (Double Output)
Input Signal	K, E, S, B, J, T, R, N, etc.; Pt100, Cu100, Cu50, BA1, BA2, etc.
Line Resistance	≤20Ω per line (RTD)
Output Signal	4~20mA
Load Resistance	$R_L \leq 550\Omega$
Compensation Accuracy	1 °C (Temp. Compensation Range: -20~60 °C)
Temperature Drift	30 ppm/°C
Response Time	≤500ms
Electromagnetic Compatibility	IEC 61326-3-1
Dielectric Strength	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
Insulation Resistance	≥100MΩ (Input / Output / Power Supply)
Operation Temperature	-20~60 °C
Storage Temperature	-40~80 °C
Dimension (mm)	12.8 (W) * 110 (H) * 117 (D)
Output States	Whatever input fault status (except breakage), the output follows the input within measuring range. The Max. Value would not exceed the 110% of the upper limit of the measuring range (e.g. when the output signal type is 0~20mA, the Min. Output Value may be 0mA, the Max. Output Value would not exceed 22mA)

### Range & Conversion Accuracy List

Type	Range (Deg. C)	Min. Span / Accuracy
K	-200~1372	<300 °C, ±0.3 °C ≥300 °C, ±0.1 F.S
E	-100~1000	<300 °C, ±0.3 °C ≥300 °C, ±0.1 F.S
J	-100~1200	<300 °C, ±0.3 °C ≥300 °C, ±0.1 F.S
N	-200~1300	<300 °C, ±0.3 °C ≥300 °C, ±0.1 F.S
S	-50~1768	<500 °C, ±0.5 °C ≥500 °C, ±0.1 F.S
R	-50~1768	<500 °C, ±0.5 °C ≥500 °C, ±0.1 F.S
T	-20~400	<300 °C, ±0.3 °C ≥300 °C, ±0.1 F.S
B	400~1820	<500 °C, ±0.5 °C ≥500 °C, ±0.1 F.S
Pt100	-200~850	<300 °C, ±0.1 °C ≥100 °C, ±0.1 F.S
Cu50	-50~150	<100 °C, ±0.1 °C ≥100 °C, ±0.1 F.S
Cu100	-50~150	<100 °C, ±0.1 °C ≥100 °C, ±0.1 F.S

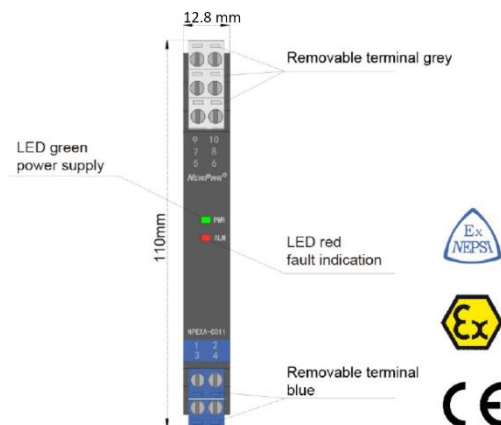

### Wiring Diagram

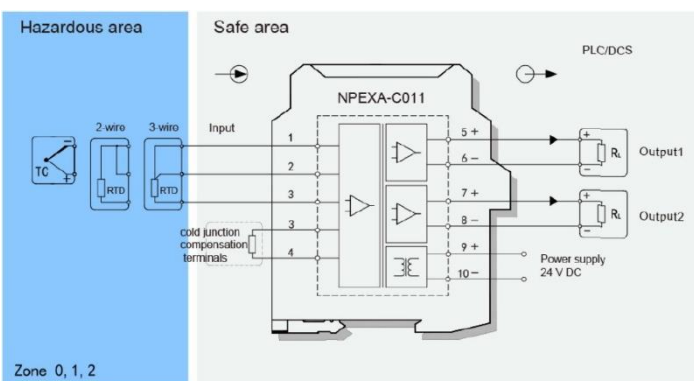

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2, 3)

$U_0=8.7V$	$I_0=33mA$	$P_0=72mW$
IIC	$C_0=5\mu F$	$L_0=28mH$
IIB	$C_0=35\mu F$	$L_0=84mH$
IIA	$C_0=700\mu F$	$L_0=224mH$

### Model Codes

NPEXA-C0	X	X	X
	PB BUS Powered (Default: Terminals Powered)		
	The Second Output Signal <sup>note 1</sup>		
	The First Output Signal <sup>note 1</sup>		

Note 1: Output Signal

Number	Output Signal
1	4~20 mA
2	1~5 V
3	0~10 mA
4	0~5 V
5	0~10 V
6	0~20 mA

# TC & RTD Isolated Safety Barrier



## NPEXA-COD11

Double Input, Double Output

Input: TC, RTD

Output: 4~20mA


Temperature Input Safety Barrier, it converts the thermocouple or thermal resistance signals from a hazardous area into current signals to a safe area by isolation. It has external cold junction compensation terminals. It needs an independent power supply. The input, output and power supply are galvanically isolated from each other. A self-test feature is also available on this device. The PC or Handheld Programmer could be adopted for parameters-modification.

### Parameters


<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	0.8W (Single Output); 1.2W (Double Output)
<b>Input Signal</b>	K, E, S, B, J, T, R, N, etc.; Pt100, Cu100, Cu50, BA1, BA2, etc.
<b>Line Resistance</b>	≤20Ω per line (RTD)
<b>Output Signal</b>	4~20mA (Sink / Source)
<b>Load Resistance</b>	$R_L \leq 550\Omega$ Sink Model: $R_L < \frac{U}{(U-3)/0.02}$ U: Loop Power Supply
<b>Compensation Accuracy</b>	1 °C (Temp. Compensation Range: -20~60 °C)
<b>Temperature Drift</b>	30 ppm/°C
<b>Response Time</b>	≤500ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	17.8 (W) * 110 (H) * 117 (D)
<b>Output States</b>	Whatever input fault status (except breakage), the output follows the input within measuring range. The Max. Value would not exceed the 110% of the upper limit of the measuring range (e.g. when the output signal type is 0~20mA, the Min. Output Value may be 0mA, the Max. Output Value would not exceed 22mA)

### Range & Conversion Accuracy List

Type	Range (Deg. C)	Min. Span / Accuracy	
K	-200~1372	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
E	-100~1000	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
J	-100~1200	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
N	-200~1300	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
S	-50~1768	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
R	-50~1768	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
T	-20~400	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
B	400~1820	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
Pt100	-200~850	<300 °C, ±0.1 °C	≥100 °C, ±0.1 F.S
Cu50	-50~150	<100 °C, ±0.1 °C	≥100 °C, ±0.1 F.S
Cu100	-50~150	<100 °C, ±0.1 °C	≥100 °C, ±0.1 F.S

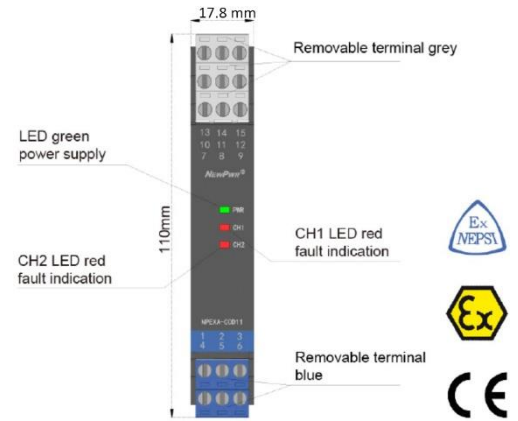

### Wiring Diagram

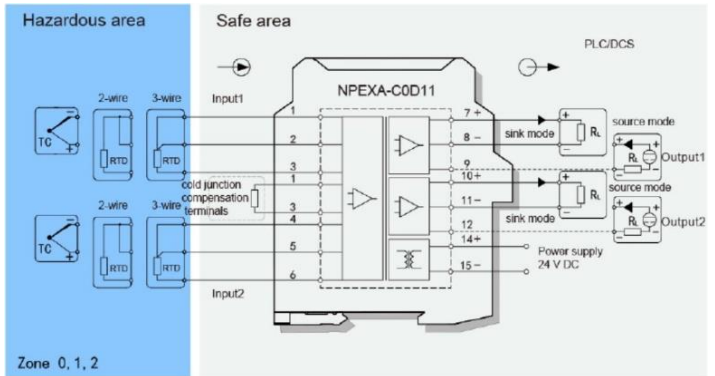

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2, 3; 4, 5, 6)

Uo=8.7 V	Io=33 mA	Po=72 mW
IIC Co= 5 μF	Lo=28 mH	
IIB Co= 35 μF	Lo=84 mH	
IIA Co= 700 μF	Lo=224 mH	

### Model Codes

NPEXA-COD	X	X	X
	PB BUS Powered (Default: Terminals Powered)		
	The Second Output Signal <sup>note 1</sup>		
	The First Output Signal <sup>note 1</sup>		

Note 1: Output Signal

Number	Output Signal
1	4~20 mA
2	1~5 V
3	0~10 mA
4	0~5 V
5	0~10 V
6	0~20 mA

# TC & RTD Isolated Safety Barrier

## NPEXA-C01T1

Single Input, Double Output

Input: TC, RTD

Output: 4~20mA, RS-485


Temperature Input Safety Barrier, it converts the thermocouple or thermal resistance signals from a hazardous area into current and RS-485 signals to a safe area by isolation. It has external cold junction compensation terminals. It needs an independent power supply. The input, output and power supply are galvanically isolated from each other. The PC or Handheld Programmer could be adopted for parameters-modification.

### Parameters


<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	0.9W (Single Output)
<b>Input Signal</b>	K, E, S, B, J, T, R, N, etc.; Pt100, Cu100, Cu50, BA1, BA2, etc.
<b>Line Resistance</b>	≤20Ω per line (RTD)
<b>Output Signal</b>	4~20mA (Output 1), RS-485 (Output 2)
<b>Load Resistance</b>	R <sub>L</sub> ≤550Ω
<b>Communication Parameters</b>	MODBUS RTU, Distances≤ 1000m
<b>Communication Bandwidth</b>	≤ 19.2 kbps
<b>Compensation Accuracy</b>	1 °C (Temp. Compensation Range: -20~60 °C)
<b>Temperature Drift</b>	40 ppm/°C
<b>Response Time</b>	≤500ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)
<b>Output States</b>	Whatever input fault status (except breakage), the output follows the input within measuring range. The Max. Value would not exceed the 110% of the upper limit of the measuring range (e.g. when the output signal type is 0~20mA, the Min. Output Value may be 0mA, the Max. Output Value would not exceed 22mA)

### Range & Conversion Accuracy List

Type	Range (Deg. C)	Min. Span / Accuracy	
K	-200~1372	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
E	-100~1000	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
J	-100~1200	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
N	-200~1300	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
S	-50~1768	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
R	-50~1768	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
T	-20~400	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
B	400~1820	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
Pt100	-200~850	<300 °C, ±0.1 °C	≥100 °C, ±0.1 F.S
Cu50	-50~150	<100 °C, ±0.1 °C	≥100 °C, ±0.1 F.S
Cu100	-50~150	<100 °C, ±0.1 °C	≥100 °C, ±0.1 F.S

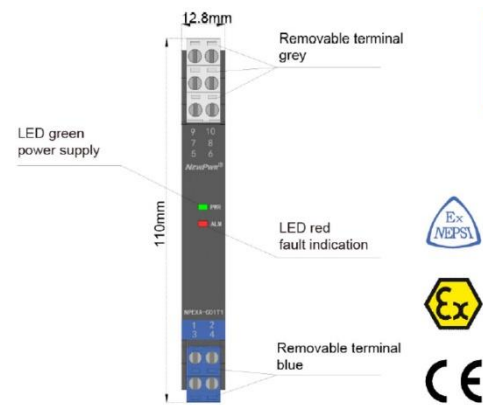

### Wiring Diagram

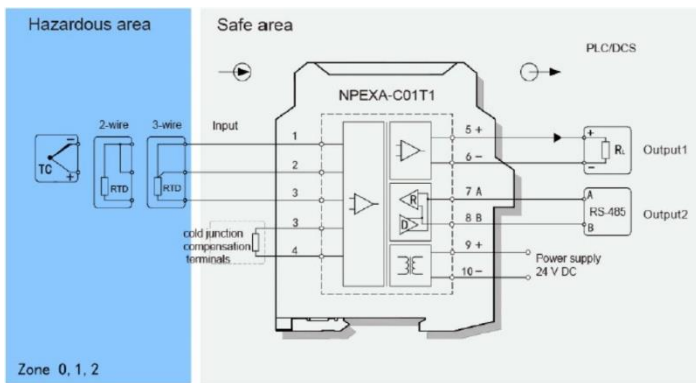

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)


Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2, 3)

U <sub>0</sub> =8.7 V	I <sub>0</sub> =33 mA	P <sub>0</sub> =72 mW
IIC Co= 5 μF	Lo=28 mH	
IIB Co= 35 μF	Lo=84 mH	
IIA Co= 700 μF	Lo=224 mH	

### Model Codes

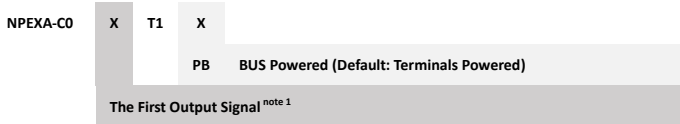

Note 1: Output Signal

Number	Output Signal
1	4~20 mA
2	1~5 V
3	0~10 mA
4	0~5 V
5	0~10 V
6	0~20 mA

# TC & RTD (Loop Powered)



## NPEXA-C01L

Input: TC, RTD

Output: 4~20mA

Single Input, Single Output


Temperature Input Safety Barrier, it converts the thermocouple or thermal resistance signals from a hazardous area into current signals to a safe area by isolation. It has external cold junction compensation terminals and loop powered. The PC or Handheld Programmer could be adopted for parameters-modification.

### Parameters


Loop Powered	12V DC~30V DC (Reverse Power Protection)
Input Signal	K, E, S, B, J, T, R, N, etc.; Pt100, Cu100, Cu50, BA1, BA2, etc.
Line Resistance	≤20Ω per line (RTD)
Output Signal	4~20mA
Load Resistance	$R_L \leq [(U-12)/0.02]\Omega$ ; U is loop powered voltage
Compensation Accuracy	1 °C (Temp. Compensation Range: -20~60 °C)
Temperature Drift	30 ppm/°C
Response Time	≤500ms
Electromagnetic Compatibility	IEC 61326-3-1
Dielectric Strength	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side)
Insulation Resistance	≥100MΩ (Input / Output / Power Supply)
Operation Temperature	-20~60 °C
Storage Temperature	-40~80 °C
Dimension (mm)	12.8 (W) * 110 (H) * 117 (D)
Output States	Whatever input fault status (except breakage, the output is 3.5mA), the output follows the input within measuring range. The Max. Value would not exceed 22mA, the Max. Output Value would not less than 3.5mA

### Range & Conversion Accuracy List

Type	Range (Deg. C)	Min. Span / Accuracy	
K	-200~1372	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
E	-100~1000	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
J	-100~1200	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
N	-200~1300	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
S	-50~1768	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
R	-50~1768	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
T	-20~400	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
B	400~1820	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
Pt100	-200~850	<300 °C, ±0.1 °C	≥100 °C, ±0.1 F.S
Cu50	-50~150	<100 °C, ±0.1 °C	≥100 °C, ±0.1 F.S
Cu100	-50~150	<100 °C, ±0.1 °C	≥100 °C, ±0.1 F.S

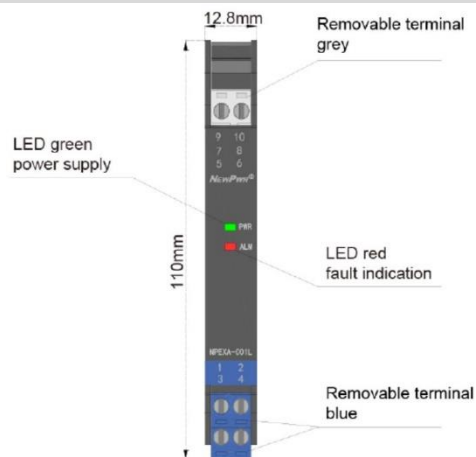

### Wiring Diagram

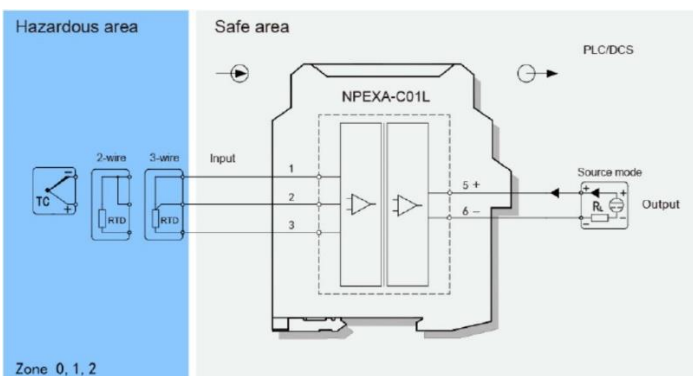

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2, 3)

Uo=6.2 V	Io=22 mA	Po=35 mW
IIC Co= 30 μF	Lo=40 mH	
IIB Co= 700 μF	Lo=120 mH	
IIA Co= 700 μF	Lo=320 mH	

# TC & RTD Isolated Safety Barrier

## NPEXA-K01

Single Input, Single Output

Input: TC, RTD

Output: 4~20mA


Temperature Input Safety Barrier, it converts the thermocouple or thermal resistance signals from a hazardous area into current signals to a safe area by isolation. It has external cold junction compensation terminals. It needs an independent power supply. The input, output and power supply are galvanically isolated from each other. The PC or Handheld Programmer could be adopted for parameters-modification.

### Parameters


Power Supply	20V DC~30V DC (Reverse Power Protection)
Power Dissipation	0.7W
Input Signal	K, E, S, B, J, T, R, N, etc.; Pt100, Cu100, Cu50, BA1, BA2, etc.
Line Resistance	≤20Ω per line (RTD)
Output Signal	4~20mA
Load Resistance	$R_L \leq 550\Omega$
Compensation Accuracy	1 °C (Temp. Compensation Range: -20~60 °C)
Temperature Drift	30 ppm/°C
Response Time	≤500ms
Electromagnetic Compatibility	IEC 61326-3-1
Dielectric Strength	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
Insulation Resistance	≥100MΩ (Input / Output / Power Supply)
Operation Temperature	-20~60 °C
Storage Temperature	-40~80 °C
Dimension (mm)	12.8 (W) * 110 (H) * 117 (D)
Output States	<3.6mA or >21.5mA

### Range & Conversion Accuracy List

Type	Range (Deg. C)	Min. Span / Accuracy	
K	-200~1372	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
E	-100~1000	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
J	-100~1200	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
N	-200~1300	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
S	-50~1768	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
R	-50~1768	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
T	-20~400	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
B	400~1820	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
Pt100	-200~850	<300 °C, ±0.1 °C	≥100 °C, ±0.1 F.S
Cu50	-50~150	<100 °C, ±0.1 °C	≥100 °C, ±0.1 F.S
Cu100	-50~150	<100 °C, ±0.1 °C	≥100 °C, ±0.1 F.S

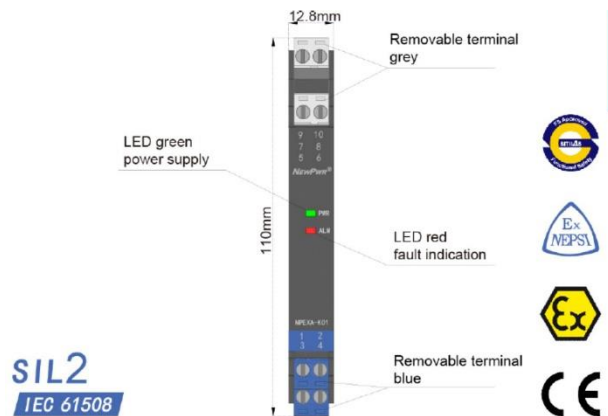

### Wiring Diagram

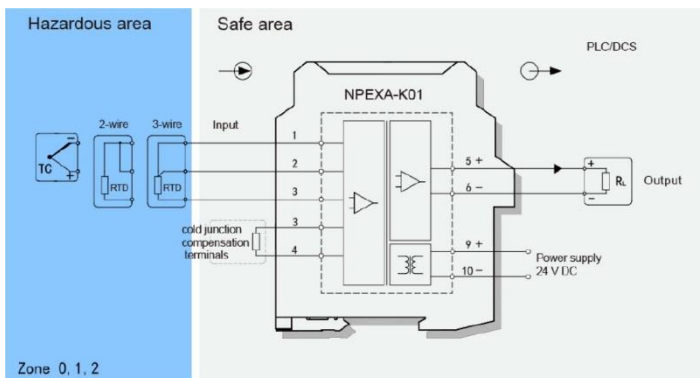

### Explosive-Proof Parameters

Functional Safety Level (SIL): SIL2, SC2 according to IEC 61508

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2, 3)

Uo=4.9 V	Io=25.4 mA	Po=31.3 mW
IIC	Co= 69.9 μF	Lo=69.9 mH
IIB	Co= 700 μF	Lo=210 mH
IIA	Co= 700 μF	Lo=560 mH

# TC Isolated Safety Barrier



## NPEXA-C11 NPEXA-C111

Single Input, Single Output  
Single Input, Double Output

Input: TC

Output: 4~20mA


Temperature Input Safety Barrier, it converts the thermocouple signals from a hazardous area into current signals to a safe area by isolation. It has external cold junction compensation terminals. It needs an independent power supply. The input, output and power supply are galvanically isolated from each other. A self-test feature is also available on this device. The PC or Handheld Programmer could be adopted for parameters-modification.

### Parameters


Power Supply	18V DC~60V DC (Reverse Power Protection)
Power Dissipation	0.8W (Single Output); 1.2W (Double Output)
Input Signal	K, E, S, B, J, T, R, N, etc.
Output Signal	4~20mA
Load Resistance	$R_L \leq 550\Omega$
Compensation Accuracy	1 °C (Temp. Compensation Range: -20~60 °C)
Temperature Drift	30 ppm/°C
Response Time	≤500ms
Electromagnetic Compatibility	IEC 61326-3-1
Dielectric Strength	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
Insulation Resistance	≥100MΩ (Input / Output / Power Supply)
Operation Temperature	-20~60 °C
Storage Temperature	-40~80 °C
Dimension (mm)	12.8 (W) * 110 (H) * 117 (D)
Output States	Whatever input fault status (except breakage), the output follows the input within measuring range. The Max. Value would not exceed the 110% of the upper limit of the measuring range (e.g. when the output signal type is 0~20mA, the Min. Output Value may be 0mA, the Max. Output Value would not exceed 22mA)

### Range & Conversion Accuracy List

Type	Range (Deg. C)	Min. Span / Accuracy	
K	-200~1372	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
E	-100~1000	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
J	-100~1200	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
N	-200~1300	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
S	-50~1768	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
R	-50~1768	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
T	-20~400	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
B	400~1820	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S

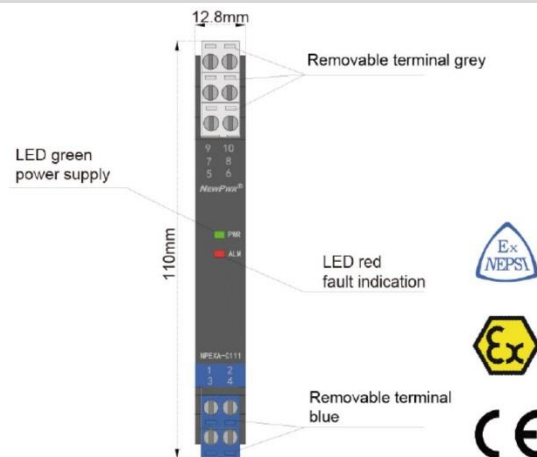

### Wiring Diagram

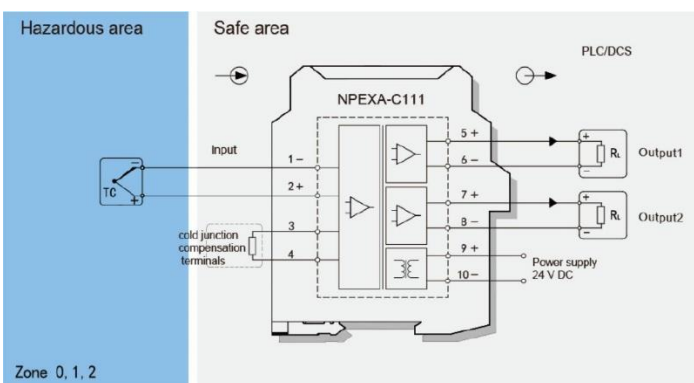

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)


Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2)

Uo=8.7 V	Io=33 mA	Po=72 mW
IIC	Co= 5 μF	Lo=28 mH
IIB	Co= 35 μF	Lo=84 mH
IIA	Co= 700 μF	Lo=224 mH

### Model Codes

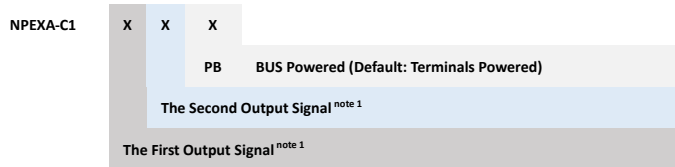

Note 1: Output Signal

Number	Output Signal
1	4~20 mA
2	1~5 V
3	0~10 mA
4	0~5 V
5	0~10 V
6	0~20 mA

# TC Isolated Safety Barrier

## NPEXA-C1D11

Double Input, Double Output

Input: TC

Output: 4~20mA


Temperature Input Safety Barrier, it converts the thermocouple signals from a hazardous area into current signals to a safe area by isolation. It has external cold junction compensation terminals. It needs an independent power supply. The input, output and power supply are galvanically isolated from each other. A self-test feature is also available on this device. The PC or Handheld Programmer could be adopted for parameters-modification.

### Parameters


<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	1.2W (Double Output)
<b>Input Signal</b>	K, E, S, B, J, T, R, N, etc.
<b>Output Signal</b>	4~20mA (Sink / Source)
<b>Load Resistance</b>	Source $R_L \leq 550\Omega$
	Sink Mode $R_L < [(U-3)/0.02]\Omega$
	U Loop Power Supply
<b>Compensation Accuracy</b>	1 °C (Temp. Compensation Range: -20~60 °C)
<b>Temperature Drift</b>	30 ppm/°C
<b>Response Time</b>	≤500ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side)
	≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	17.8 (W) * 110 (H) * 117 (D)
<b>Output States</b>	Whatever input fault status (except breakage), the output follows the input within measuring range. The Max. Value would not exceed the 110% of the upper limit of the measuring range (e.g. when the output signal type is 0~20mA, the Min. Output Value may be 0mA, the Max. Output Value would not exceed 22mA)

### Range & Conversion Accuracy List

Type	Range (Deg. C)	Min. Span / Accuracy	
K	-200~1372	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
E	-100~1000	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
J	-100~1200	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
N	-200~1300	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
S	-50~1768	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
R	-50~1768	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
T	-20~400	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
B	400~1820	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S

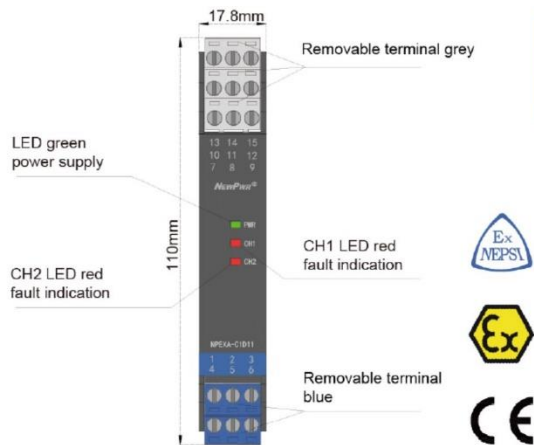

### Wiring Diagram

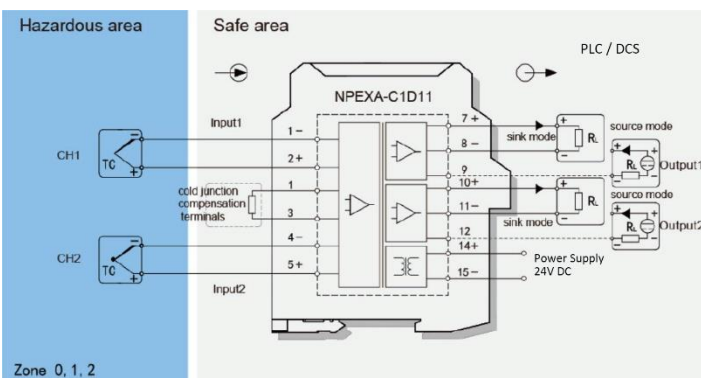

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)


Ex-Proof Grade: [Ex ia Ga] IIC

Um= 250V

Certified Parameters (Terminals 1, 2; 4, 5)

Uo=8.7 V	Io=33 mA	Po=72 mW
IIC	Co= 5 μF	Lo=28 mH
IIB	Co= 35 μF	Lo=84 mH
IIA	Co= 700 μF	Lo=224 mH

### Model Codes

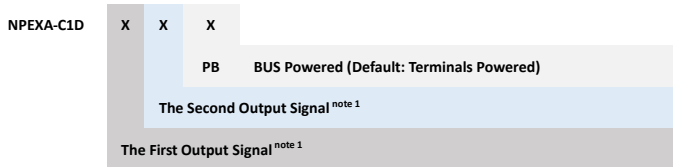

Note 1: Output Signal

Number	Output Signal
1	4~20 mA
2	1~5 V
3	0~10 mA
4	0~5 V
5	0~10 V
6	0~20 mA

# TC Isolated Safety Barrier



## NPEXA-C17 NPEXA-C177

Single Input, Single Output

Single Input, Double Output


Input: TC

Output: 1:1 mV


Millivolt Input Safety Barrier, it converts the Millivolt signals from a hazardous area into 1:1 mV signals to a safety area by isolation. The input, output and power supply are galvanically isolated from each other.

### Parameters

<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	0.8W (Single Output); 1.2W (Double Output)
<b>Input Signal</b>	0 mV~100 mV
<b>Output Signal</b>	1:1 mV
<b>Load Resistance</b>	≥ 10kΩ
<b>Compensation Accuracy</b>	± 0.1% F.S
<b>Temperature Drift</b>	30 ppm/°C
<b>Response Time</b>	≤500ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)
<b>Output States</b>	Whatever input fault status (except breakage), the output follows the input within measuring range. The Max. Value would not exceed the 110% of the upper limit of the measuring range (e.g. when the output signal type is 0~20mA, the Min. Output Value may be 0mA, the Max. Output Value would not exceed 22mA)

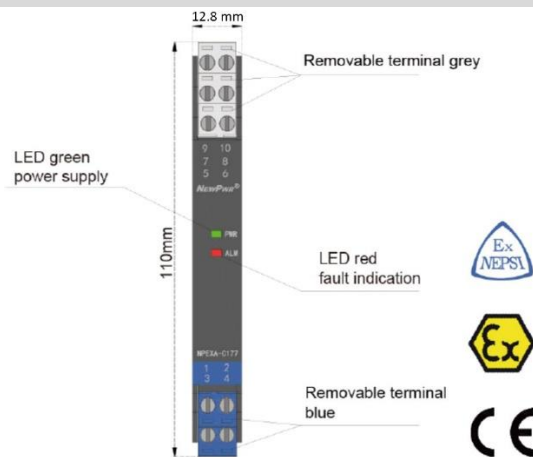

### Wiring Diagram

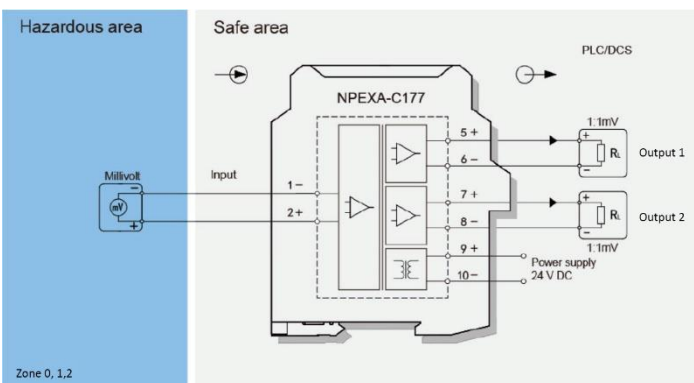

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2)

Uo=8.7 V	Io=33 mA	Po=72 mW
IIC Co= 5 μF	Lo=28 mH	
IIB Co= 35 μF	Lo=84 mH	
IIA Co= 700 μF	Lo=224 mH	

# TC Isolated Safety Barrier

## NPEXA-C171

Single Input, Double Output


Input: TC

Output: 1:1 mA; 4~20mA


Millivolt Input Safety Barrier, it converts the Millivolt signals from a hazardous area into 1:1 mV signals to a safety area by isolation. It has external cold junction compensation terminals. It needs an independent power supply. The input, output and power supply are galvanically isolated from each other. The PC or Handheld Programmer could be adopted for parameters-modification.

### Parameters

<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	1.2W
<b>Input Signal</b>	0 mA~ 100 mV
<b>Output Signal</b>	1:1 mV (Output 1) 4~20 mA (Output 2)
<b>Load Resistance</b>	Output 1 $R_L \geq 10k\Omega$ Output 2 $R_L \leq 550\Omega$
<b>Temperature Drift</b>	30 ppm/°C
<b>Response Time</b>	≤500ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)
<b>Output States</b>	Whatever input fault status (except breakage), the output follows the input within measuring range. The Max. Value would not exceed the 110% of the upper limit of the measuring range (e.g. when the output signal type is 0~20mA, the Min. Output Value may be 0mA, the Max. Output Value would not exceed 22mA)

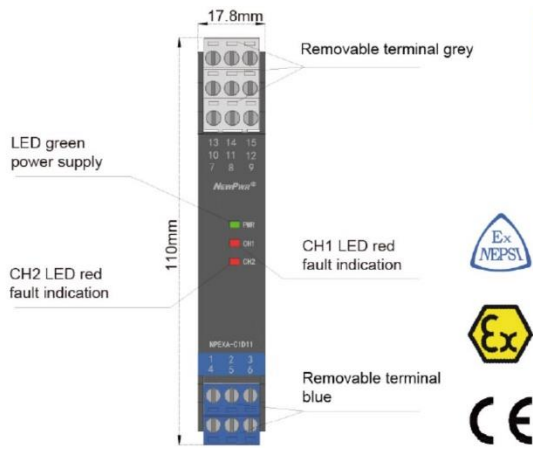

### Wiring Diagram

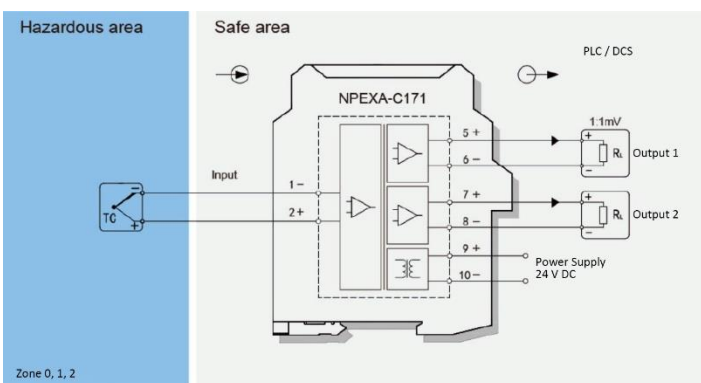

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2)

Uo=8.7 V	Io=33 mA	Po=72 mW
IIC Co= 5 μF	Lo=28 mH	
IIB Co= 35 μF	Lo=84 mH	
IIA Co= 700 μF	Lo=224 mH	

### Model Codes

NPEXA-C17	X	X
		PB BUS Powered (Default: Terminals Powered)
		The First Output Signal <sup>note 1</sup>

Note 1: Output Signal

Number	Output Signal
1	4~20 mA
2	1~5 V
3	0~10 mA
4	0~5 V
5	0~10 V
6	0~20 mA

# TC Isolated Safety Barrier



## NPEXA-C11T1

Single Input, Double Output

Input: TC

Output: 4~20mA, RS485


Temperature Input Safety Barrier, it converts the thermocouple signals from a hazardous area into current and RS485 signals to a safe area by isolation. It has external cold junction compensation terminals. It needs an independent power supply. The input, output and power supply are galvanically isolated from each other. The PC or Handheld Programmer could be adopted for parameters-modification.

### Parameters


Power Supply	18V DC~60V DC (Reverse Power Protection)
Power Dissipation	0.9W
Input Signal	K, E, S, B, J, T, R, N, etc.
Output Signal	4~20mA (Output 1) RS485 (Output 2)
Load Resistance	$R_L \leq 550\Omega$
Communication Parameters	Modbus RTU, Distance $\leq 1000m$
Communication Bandwidth	$\leq 19.2$ kbps
Compensation Accuracy	1 °C (Temp. Compensation Range: -20~60 °C)
Temperature Drift	40 ppm/°C
Response Time	$\leq 500ms$
Electromagnetic Compatibility	IEC 61326-3-1
Dielectric Strength	$\geq 3000VAC$ (Intrinsically Safe Side / Non-Intrinsically Safe Side) $\geq 1500VAC$ (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
Insulation Resistance	$\geq 100M\Omega$ (Input / Output / Power Supply)
Operation Temperature	-20~60 °C
Storage Temperature	-40~80 °C
Dimension (mm)	12.8 (W) * 110 (H) * 117 (D)
Output States	Whatever input fault status (except breakage), the output follows the input within measuring range. The Max. Value would not exceed the 110% of the upper limit of the measuring range (e.g. when the output signal type is 0~20mA, the Min. Output Value may be 0mA, the Max. Output Value would not exceed 22mA)

### Range & Conversion Accuracy List

Type	Range (Deg. C)	Min. Span / Accuracy	
K	-200~1372	<300 °C, $\pm 0.3$ °C	$\geq 300$ °C, $\pm 0.1$ F.S
E	-100~1000	<300 °C, $\pm 0.3$ °C	$\geq 300$ °C, $\pm 0.1$ F.S
J	-100~1200	<300 °C, $\pm 0.3$ °C	$\geq 300$ °C, $\pm 0.1$ F.S
N	-200~1300	<300 °C, $\pm 0.3$ °C	$\geq 300$ °C, $\pm 0.1$ F.S
S	-50~1768	<500 °C, $\pm 0.5$ °C	$\geq 500$ °C, $\pm 0.1$ F.S
R	-50~1768	<500 °C, $\pm 0.5$ °C	$\geq 500$ °C, $\pm 0.1$ F.S
T	-20~400	<300 °C, $\pm 0.3$ °C	$\geq 300$ °C, $\pm 0.1$ F.S
B	400~1820	<500 °C, $\pm 0.5$ °C	$\geq 500$ °C, $\pm 0.1$ F.S

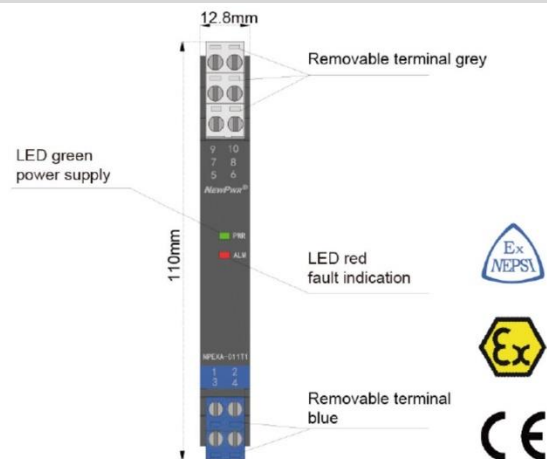

### Wiring Diagram

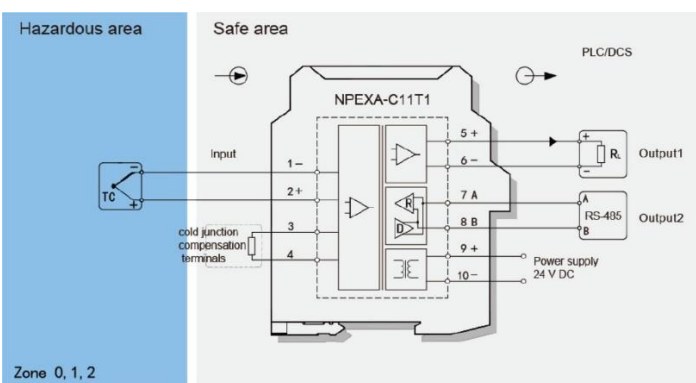

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)


Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2)

Uo=8.7 V	Io=33 mA	Po=72 mW
IIC Co= 5 $\mu F$	Lo=28 mH	
IIB Co= 35 $\mu F$	Lo=84 mH	
IIA Co= 700 $\mu F$	Lo=224 mH	

### Model Codes

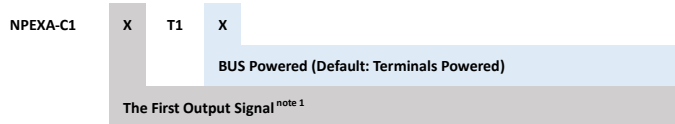

Note 1: Output Signal

Number	Output Signal
1	4~20 mA
2	1~5 V
3	0~10 mA
4	0~5 V
5	0~10 V
6	0~20 mA

# TC Loop Powered

## NPEXA-C11L

Single Input, Single Output

Input: TC

Output: 4~20mA


Temperature Input Safety Barrier, it converts the thermocouple signals from a hazardous area into current signals to a safety area by isolation. It has external cold junction compensation terminals and loop powered. The PC or Handheld Programmer could be adopted for parameters-modification.

### Parameters


<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)	
<b>Input Signal</b>	K, E, S, B, J, T, R, N, etc.	
<b>Output Signal</b>	4~20 mA	
<b>Load Resistance</b>	Output 1	$R_L < [(U-12)/0.02]\Omega$
	U	Loop Powered Voltage
<b>Temperature Drift</b>	30 ppm/°C	
<b>Response Time</b>	≤500ms	
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1	
<b>Dielectric Strength</b>	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side)	
	≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)	
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)	
<b>Operation Temperature</b>	-20~60 °C	
<b>Storage Temperature</b>	-40~80 °C	
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)	
<b>Output States</b>	Whatever input fault status (except breakage, the output is 3.5 mA), the output follows the input within measuring range. The Max. Value would not exceed 22mA, the Max. Output value would not less than 3.5 m	

### Range & Conversion Accuracy List

Type	Range (Deg. C)	Min. Span / Accuracy	
K	-200~1372	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
E	-100~1000	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
J	-100~1200	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
N	-200~1300	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
S	-50~1768	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
R	-50~1768	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S
T	-20~400	<300 °C, ±0.3 °C	≥300 °C, ±0.1 F.S
B	400~1820	<500 °C, ±0.5 °C	≥500 °C, ±0.1 F.S

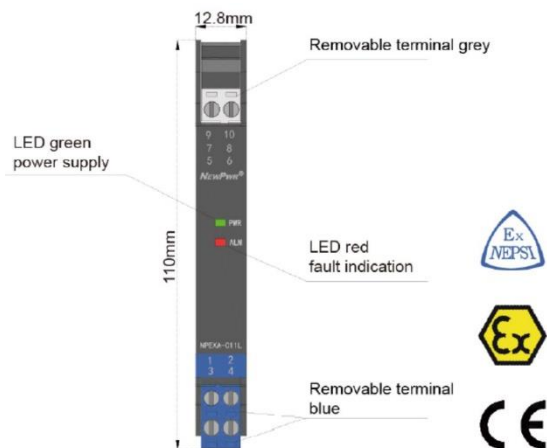

### Wiring Diagram

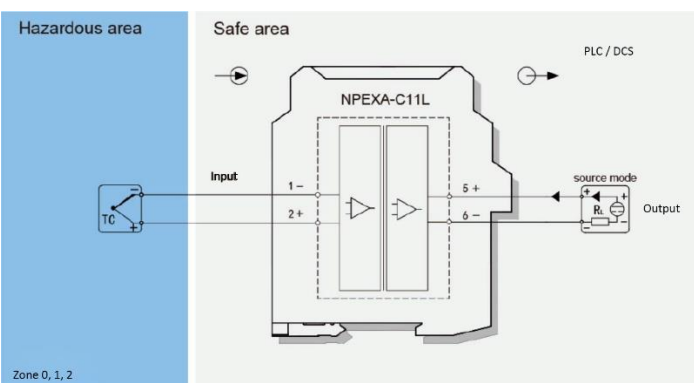

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation

(NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2)

Uo=5.0 V	Io=2.5 mA	Po=3.2 mW
IIC	Co= 90 μF	Lo=100 mH
IIB	Co= 700 μF	Lo=210 mH
IIA	Co= 700 μF	Lo=800 mH

# RTD Isolated Safety Barrier



## NPEXA-C21 NPEXA-C211

Single Input, Single Output

Single Input, Double Output

Input: RTD

Output: 4~20mA

Temperature Input Safety Barrier, it converts the thermal resistance signal from a hazardous area into current signal to a safe area by isolation. It needs an independent power supply. The input, output and power supply are galvanically isolated from each other. A self-test feature is also available on this device.


The PC or Handheld Programmer could be adopted for parameters-modification.

### Parameters


<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	0.8W (Single Output); 1.2W (Double Output)
<b>Input Signal</b>	Pt100, Cu100, Cu50, BA1, BA2, etc.
<b>Line Resistance</b>	≤20Ω per line (RTD)
<b>Output Signal</b>	4~20mA
<b>Load Resistance</b>	$R_L \leq 550\Omega$
<b>Temperature Drift</b>	30 ppm/°C
<b>Response Time</b>	≤500 ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)
<b>Output States</b>	Whatever input fault status (except breakage), the output follows the input within measuring range. The Max. Value would not exceed the 110% of the upper limit of the measuring range (e.g. when the output signal type is 0~20mA, the Min. Output Value may be 0mA, the Max. Output Value would not exceed 22mA)

### Range & Conversion Accuracy List

Type	Range (Deg. C)	Min. Span / Accuracy	
Pt100	-200~850	<300 °C, ±0.1 °C	≥100 °C, ±0.1 F.S
Cu50	-50~150	<100 °C, ±0.1 °C	≥100 °C, ±0.1 F.S
Cu100	-50~150	<100 °C, ±0.1 °C	≥100 °C, ±0.1 F.S

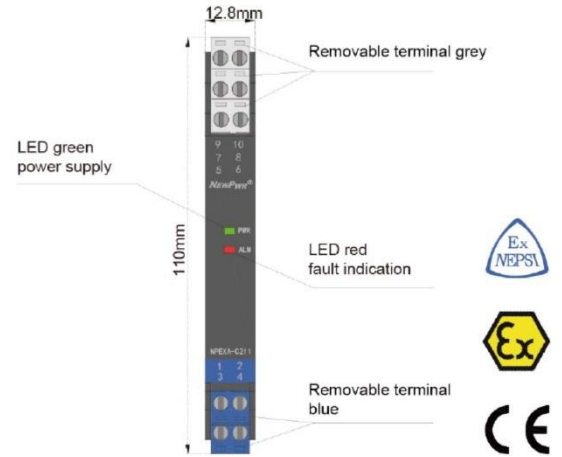

### Wiring Diagram

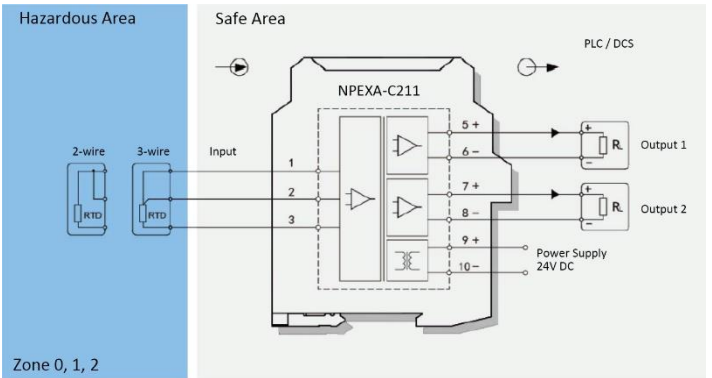

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation

(NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2, 3)

$U_0=8.7\text{ V}$	$I_0=33\text{ mA}$	$P_0=72\text{ mW}$
IIC	$C_0=5\ \mu\text{F}$	$L_0=28\text{ mH}$
IIB	$C_0=35\ \mu\text{F}$	$L_0=84\text{ mH}$
IIA	$C_0=700\ \mu\text{F}$	$L_0=224\text{ mH}$

### Model Codes

NPEXA-C2	X	X	X
BUS Powered (Default: Terminals Powered)			
The Second Output Signal <sup>note 1</sup>			
The First Output Signal <sup>note 1</sup>			

Note 1: Output Signal

Number	Output Signal
1	4~20 mA
2	1~5 V
3	0~10 mA
4	0~5 V
5	0~10 V
6	0~20 mA

# RTD Isolated Safety Barrier

## NPEXA-C2D11

Double Input, Double Output

Input: RTD

Output: 4~20mA

Temperature Input Safety Barrier, it converts the thermal resistance signal from a hazardous area into current signal to a safe area by isolation. It needs an independent power supply. The input, output and power supply are galvanically isolated from each other. A self-test feature is also available on this device.

The PC or Handheld Programmer could be adopted for parameters-modification.

### Parameters

Power Supply	18V DC~60V DC (Reverse Power Protection)	
Power Dissipation	1.2W	
Input Signal	Pt100, Cu100, Cu50, BA1, BA2, etc.	
Line Resistance	≤20Ω per line (RTD)	
Output Signal	4~20 mA (Sink / Source)	
Load Resistance	Source Mode	$R_L \leq 550\Omega$
	Sink Mode	$R_L < [(U-3)/0.02]\Omega$
	U	Loop Power Supply

Temperature Drift	30 ppm/°C
Response Time	≤500ms

Electromagnetic Compatibility	IEC 61326-3-1
-------------------------------	---------------

Dielectric Strength	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side)
	≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)

Insulation Resistance	≥100MΩ (Input / Output / Power Supply)
-----------------------	--

Operation Temperature	-20~60 °C
-----------------------	-----------


Storage Temperature	-40~80 °C
---------------------	-----------

Dimension (mm)	17.8 (W) * 110 (H) * 117 (D)
----------------	------------------------------


**Output States**  
Whatever input fault status (except breakage), the output follows the input within measuring range. The Max. Value would not exceed the 110% of the upper limit of the measuring range (e.g. when the output signal type is 0~20mA, the Min. Output Value may be 0mA, the Max. Output Value would not exceed 22mA)

#### Range & Conversion Accuracy List

Type	Range (Deg. C)	Min. Span / Accuracy	
Pt100	-200~850	<300 °C, ±0.1 °C	≥100 °C, ±0.1 F.S
Cu50	-50~150	<100 °C, ±0.1 °C	≥100 °C, ±0.1 F.S
Cu100	-50~150	<100 °C, ±0.1 °C	≥100 °C, ±0.1 F.S

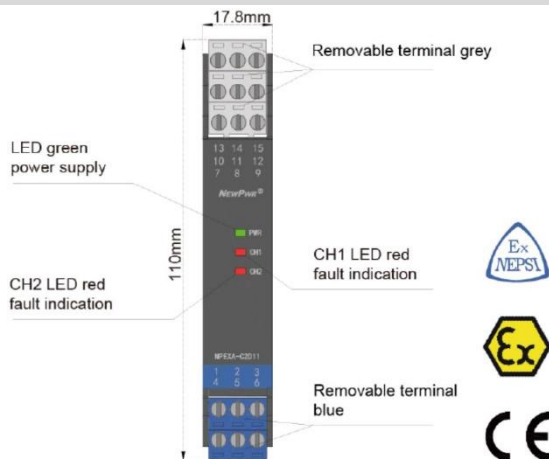

### Wiring Diagram

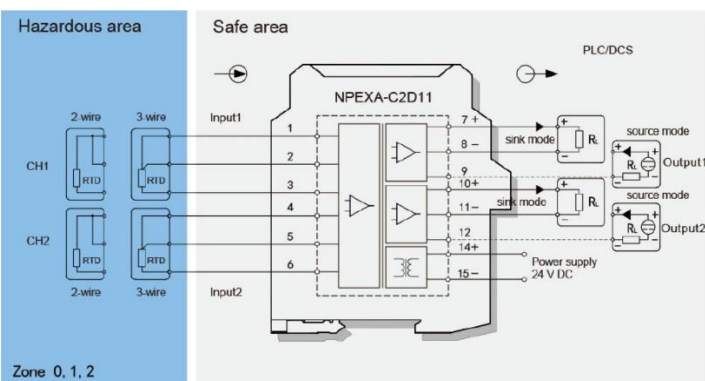

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2, 3)

Uo=8.7 V	Io=33 mA	Po=72 mW
IIC	Co= 5 μF	Lo=28 mH
IIB	Co= 35 μF	Lo=84 mH
IIA	Co= 700 μF	Lo=224 mH

### Model Codes

NPEXA-C2D	X	X	X
BUS Powered (Default: Terminals Powered)			
The Second Output Signal <sup>note 1</sup>			
The First Output Signal <sup>note 1</sup>			

Note 1: Output Signal

Number	Output Signal
1	4~20 mA
2	1~5 V
3	0~10 mA
4	0~5 V
5	0~10 V
6	0~20 mA

# RTD Isolated Safety Barrier



## NPEXA-C27 NPEXA-C277

Single Input, Single Output

Single Input, Double Output


Input: RTD

Output: 1:1 Resistance


Millivolt Input Safety Barrier, it converts the resistance signal from a hazardous area into 1:1 resistance signal to a safe area by isolation. The input, output and power supply are galvanically isolated from each other.

### Parameters

<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	0.4W
<b>Input Signal</b>	18Ω~400Ω
<b>Line Resistance</b>	≤20Ω per line (RTD)
<b>Output Signal</b>	1:1 Resistance
<b>Exciting Current</b>	0.1mA~10mA
<b>Conversion Accuracy</b>	Excitation Current Accuracy ±0.1% F.S (0.5mA~10mA) or <0.2Ω; <i>select Max.</i> 0.1mA~0.5mA Max. Value 1.5Ω
<b>Temperature Drift</b>	30 ppm/°C
<b>Response Time</b>	≤500 ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	17.8 (W) * 110 (H) * 117 (D)
<b>Output States</b>	Whatever input fault status (except breakage, breakage output about 16Ω), the output follows the input within measuring range.  The Max. Output Value would not exceed 430Ω

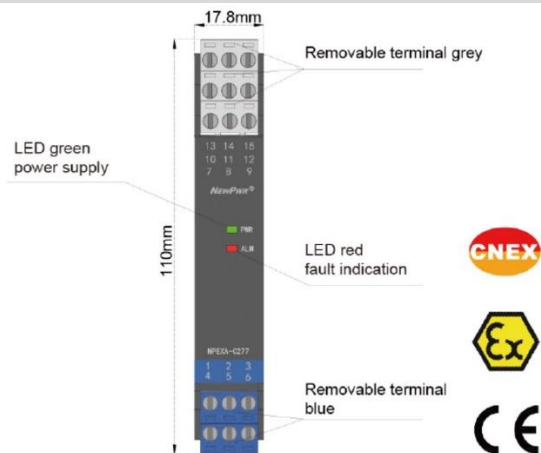

### Wiring Diagram

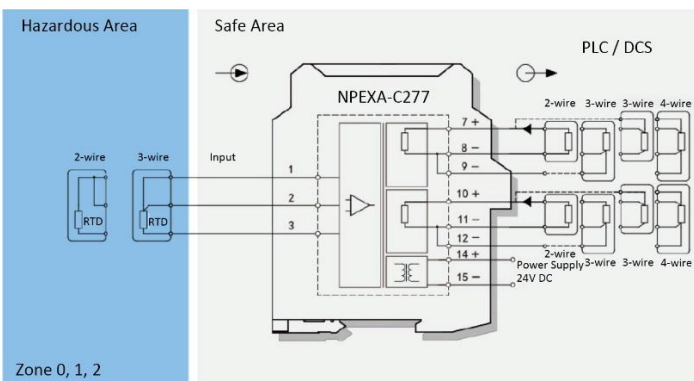

### Explosive-Proof Parameters

China National Quality Supervision & Test Centre for Explosion Protected Electrical Products(CQST)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2, 3)

Uo=8.7 V	Io=33 mA	Po=72 mW
IIC Co= 5 μF	Lo=28 mH	
IIB Co= 35 μF	Lo=84 mH	
IIA Co= 700 μF	Lo=224 mH	

# RTD Isolated Safety Barrier

## NPEXA-C271

Single Input, Double Output


Input: RTD

Output: 1:1 Resistance, 4~20mA


Resistance Input Safety Barrier, it converts the resistance signals from a hazardous area into 1:1 resistance and current signals to a safe area by isolation. It needs an independent power supply. The input, output and power supply are galvanically isolated from each other. The PC or Handheld Programmer could be adopted for parameters-modification.

### Parameters

<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)		
<b>Power Dissipation</b>	1.0 W		
<b>Input Signal</b>	18Ω~400Ω		
<b>Line Resistance</b>	≤20Ω per line (RTD)		
<b>Output Signal</b>	Output 1	1:1 Resistance	
	Output 2	4~20mA (sink / source)	
<b>Load Resistance</b>	Source Mode	$R_L \leq 550\Omega$	Sink Mode $R_L < [(U-3)/0.02]\Omega$
	U	Loop Power Supply	
<b>Exciting Current</b>	0.1mA~10mA		
<b>Conversion Accuracy</b>	25 °C ±2°C		
<b>Output 1</b>	Excitation Current Acc.	0.5mA~10mA ±0.1% F.S or <0.2Ω (select Max.)	
		0.~mA~0.5mA Max. Value 1.5Ω	
<b>Output 2</b>	Range Accuracy	<100 °C ±0.1 oC	
		≥100 °C ±0.1% F.S	
<b>Temperature Drift</b>	30 ppm/°C		
<b>Response Time</b>	≤500ms		
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1		
<b>Dielectric Strength</b>	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side)		
	≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)		
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)		
<b>Operation Temperature</b>	-20~60 °C		
<b>Storage Temperature</b>	-40~80 °C		
<b>Dimension (mm)</b>	17.8 (W) * 110 (H) * 117 (D)		
<b>Output States</b>	Whatever input fault status (except breakage, breakage output1 about 16Ω, breakage output2 about 0V/mA), the output follows the input within measuring range. Output1 the Max. Value would not exceed the upper limit of 430Ω, output2 the Max. Value would not exceed the 110% of the upper limit of the measuring range (e.g. when the output signal type is 0~20mA, the Min. Output Value may be 0mA, the Max. Output Value would not exceed 22mA)		

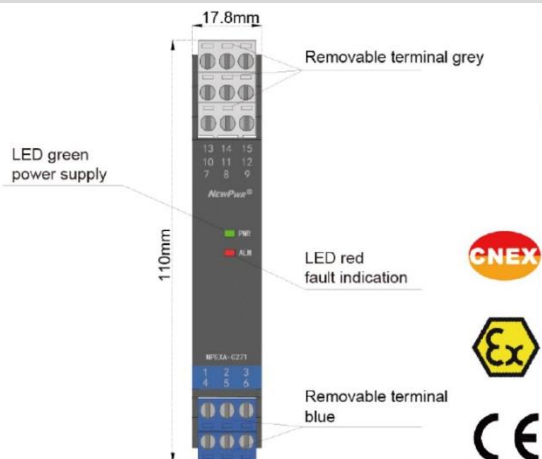

### Wiring Diagram

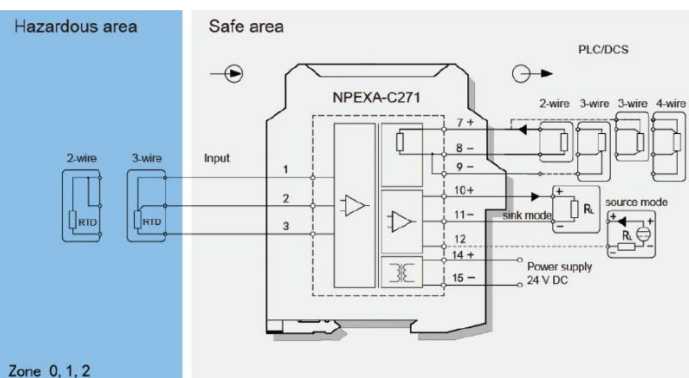

### Explosive-Proof Parameters

China National Quality Supervision & Test Centre for Explosion Protected Electrical Products(CQST)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2, 3)

Uo=8.7 V	Io=33 mA	Po=72 mW
IIC	Co= 5 μF	Lo=28 mH
IIB	Co= 35 μF	Lo=84 mH
IIA	Co= 700 μF	Lo=224 mH

### Model Codes

NPEXA-C27	X	X
BUS Powered (Default: Terminals Powered)		
The Second Output Signal <sup>note 1</sup>		

Note 1: Output Signal

Number	Output Signal
1	4~20 mA
2	1~5 V
3	0~10 mA
4	0~5 V
5	0~10 V
6	0~20 mA

# RTD Isolated Safety Barrier



## NPEXA-C21T1

Single Input, Double Output

Input: RTD

Output: 4~20mA, RS-485


Temperature Input Safety Barrier, it converts the resistance signals from a hazardous area into current and RS-485 signals to a safe area by isolation. It needs an independent power supply. The input, output and power supply are galvanically isolated from each other. The PC or Handheld Programmer could be adopted for parameters-modification.

### Parameters


<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	0.9 W
<b>Input Signal</b>	Pt100, Cu100, Cu50, BA1, BA2, etc.
<b>Line Resistance</b>	≤20Ω per line (RTD)
<b>Output Signal</b>	Output 1      4~20mA Output 2      RS-485
<b>Load Resistance</b>	R <sub>L</sub> ≤ 550Ω
<b>Communication Parameters</b>	Modbus RTU, Distances ≤ 1000m
<b>Communication Bandwidth</b>	≤ 19.2 kbps
<b>Temperature Drift</b>	40 ppm/°C
<b>Response Time</b>	≤ 500 ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥ 3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥ 1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥ 100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)
<b>Output States</b>	Whatever input fault status (except breakage), the output follows the input within measuring range. The Max. Value would not exceed the 110% of the upper limit of the measuring range (e.g. when the output signal type is 0~20mA, the Min. Output Value may be 0mA, the Max. Output Value would not exceed 22mA)

#### Range & Conversion Accuracy List

Type	Range (Deg. C)	Min. Span / Accuracy	
Pt100	-200~850	<300 °C, ±0.1 °C	≥100 °C, ±0.1 F.S
Cu50	-50~150	<100 °C, ±0.1 °C	≥100 °C, ±0.1 F.S
Cu100	-50~150	<100 °C, ±0.1 °C	≥100 °C, ±0.1 F.S

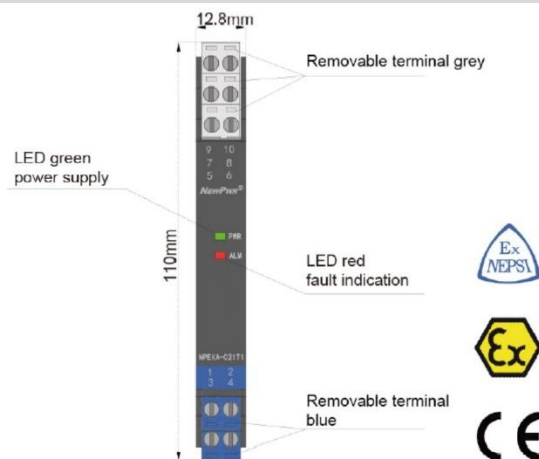

### Wiring Diagram

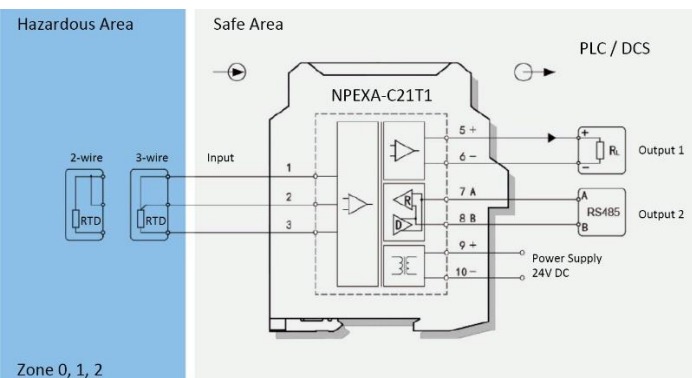

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)


Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2, 3)

U <sub>0</sub> =8.7 V	I <sub>0</sub> =33 mA	P <sub>0</sub> =72 mW
IIC    Co= 5 μF	Lo=28 mH	
IIB    Co= 35 μF	Lo=84 mH	
IIA    Co= 700 μF	Lo=224 mH	

### Model Codes

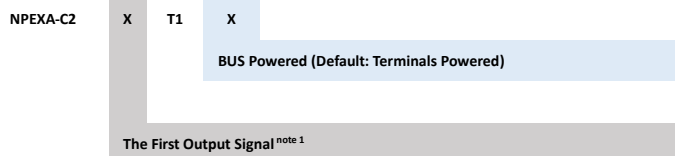

Note 1: Output Signal

Number	Output Signal
1	4~20 mA
2	1~5 V
3	0~10 mA
4	0~5 V
5	0~10 V
6	0~20 mA

# RTD Loop Powered

## NPEXA-C21L

Single Input, Single Output

Input: RTD


Output: 4~20mA

Temperature Input Safety Barrier, it converts the resistance signals from a hazardous area into current signals to a safe area by isolation. It has loop powered. The PC or Handheld Programmer could be adopted for parameters-modification.


### Parameters

<b>Power Supply</b>	12V DC~30V DC (Reverse Power Protection)	
<b>Input Signal</b>	Pt100, Cu100, Cu50, BA1, BA2, etc.	
<b>Line Resistance</b>	≤20Ω per line (RTD)	
<b>Output Signal</b>	4~20mA	
<b>Load Resistance</b>	$R_L < [(U-12)/0.02]\Omega$ U                      Loop Power Supply	
<b>Exciting Current</b>	0.1mA~10mA	
<b>Conversion Accuracy</b>	25 °C ±2°C	
<b>Output 1</b>	Excitation Current Acc.	0.5mA~10mA ±0.1% F.S or <0.2Ω (select Max.) 0.~mA~0.5mA Max. Value 1.5Ω
<b>Output 2</b>	Range Accuracy	<100 °C ±0.1 °C ≥100 °C ±0.1% F.S
<b>Temperature Drift</b>	30 ppm/°C	
<b>Response Time</b>	≤500ms	
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1	
<b>Dielectric Strength</b>	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)	
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)	
<b>Operation Temperature</b>	-20~60 °C	
<b>Storage Temperature</b>	-40~80 °C	
<b>Dimension (mm)</b>	17.8 (W) * 110 (H) * 117 (D)	

**Output States**  
 Whatever input fault status (except breakage, breakage output1 about 16Ω, breakage output2 about 0V/mA), the output follows the input within measuring range. Output1 the Max. Value would not exceed the upper limit of 430Ω, output2 the Max. Value would not exceed the 110% of the upper limit of the measuring range (e.g. when the output signal type is 0~20mA, the Min. Output Value may be 0mA, the Max. Output Value would not exceed 22mA)

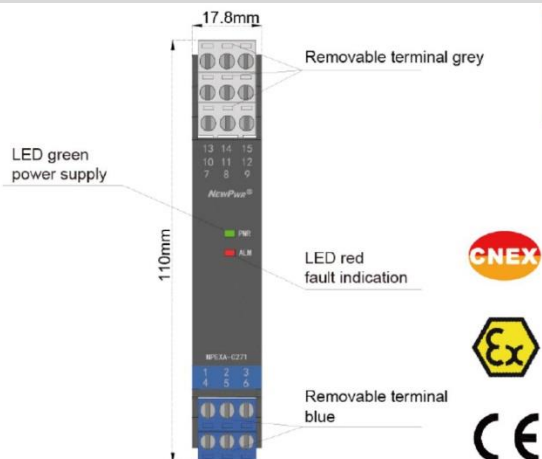

### Wiring Diagram

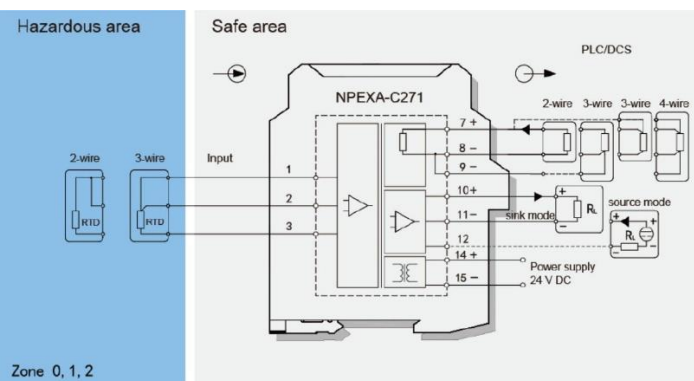

### Explosive-Proof Parameters

China National Quality Supervision & Test Centre for Explosion Protected Electrical Products(CQST)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2, 3)

Uo=8.7 V	Io=33 mA	Po=72 mW
IIC Co= 5 μF	Lo=28 mH	
IIB Co= 35 μF	Lo=84 mH	
IIA Co= 700 μF	Lo=224 mH	

### Model Codes

NPEXA-C27	X	X
BUS Powered (Default: Terminals Powered)		
The Second Output Signal <sup>note 1</sup>		

Note 1: Output Signal

Number	Output Signal
1	4~20 mA
2	1~5 V
3	0~10 mA
4	0~5 V
5	0~10 V
6	0~20 mA

# AI Isolated Safety Barrier



## NPEXA-CM31 NPEXA-CM311

Single Input, Single Output

Single Input, Double Output

Input: 4~20mA

Output: 4~20mA

This Isolated Safety Barrier detects loop current and converts it from a hazardous area into current or voltage signals to a safe area by isolation and provides transmitter with power in the hazardous area. It allows transmission of HART communication signals. The input, output and power supply are galvanically isolated from each other.


### Parameters

<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	0.8W (24V, Single Output); 1.2W (24V, Double Output)
<b>Input Signal</b>	4~20mA, HART
<b>Input Resistance</b>	Approx. 75Ω
<b>Available Voltage</b>	Open-Circuit Voltage ≤ 26V Voltage ≥ 16V @ 20mA
<b>Output Signal</b>	4~20mA, HART
<b>Load Resistance</b>	$R_L \leq 550\Omega$
<b>Accuracy</b>	0.1% F.S
<b>Temperature Drift</b>	30 ppm/°C
<b>Response Time</b>	≤ 2 ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥ 3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥ 1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥ 100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)
<b>Output States</b>	The output signal is less than 3.6mA or greater than 21.5 mA


### Other Ordering Information

Type	Input	Output 1	Output 2	Power Supply
NPEXA-CM32	4~20mA	1~5V	-----	Terminal
NPEXA-CM35	0~20mA	0~10V	-----	Terminal
NPEXA-CM312	4~20mA	4~20mA	1~5V	Terminal
NPEXA-CM322	4~20mA	1~5V	1~5V	Terminal
NPEXA-CM355	0~20mA	0~10V	0~10V	Terminal

SIL3  
IEC 61508

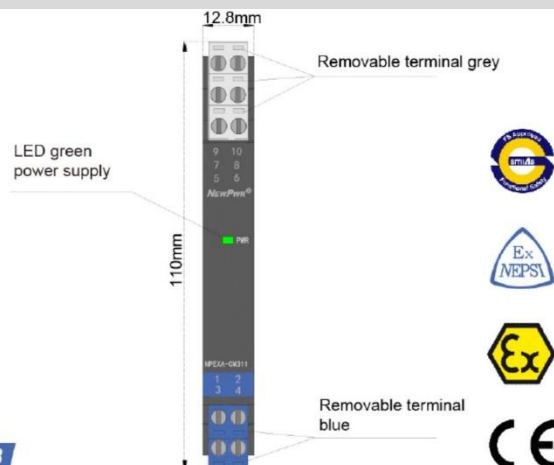

### Wiring Diagram

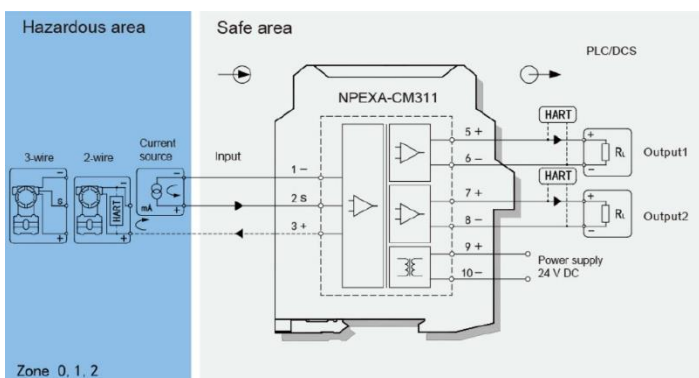

### Explosive-Proof Parameters

Functional Safety Level (SIL): SIL3, SC3 according to IEC 61508

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2)

$U_0=5V$

IIC  $C_0=70\mu F$

IIB  $C_0=700\mu F$

IIA  $C_0=700\mu F$

Certified Parameters (Terminals 2, 3)

$U_0=28V$

$I_0=93mA$

$P_0=651mW$

IIC  $C_0=0.058\mu F$   $L_0=2.8mH$

IIB  $C_0=0.45\mu F$   $L_0=8.4mH$

IIA  $C_0=1.50\mu F$   $L_0=22.4mH$

# AI Isolated Safety Barrier

## NPEXA-CM3D11

Double Input, Double Output

Input: 4~20mA

Output: 4~20mA


This Isolated Safety Barrier detects loop current and converts it from a hazardous area into current or voltage signals to a safe area by isolation and provides transmitter with power in the hazardous area. It allows transmission of HART communication signals. The input, output and power supply are galvanically isolated from each other.

### Parameters


<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	2.5W
<b>Input Signal</b>	4~20mA, HART
<b>Input Resistance</b>	Approx. 75Ω
<b>Available Voltage</b>	Open-Circuit Voltage $\leq 25V$
	Voltage $\geq 15V @ 20mA$
<b>Output Signal</b>	4~20mA (Sink / Source), HART
<b>Load Resistance</b>	Source $R_L \leq 550\Omega$
	Sink $R_L < [(U-3)/0.02]\Omega$
	U Loop Power Supply
<b>Accuracy</b>	0.1% F.S
<b>Temperature Drift</b>	30 ppm/°C
<b>Response Time</b>	$\leq 2$ ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	$\geq 3000VAC$ (Intrinsically Safe Side / Non-Intrinsically Safe Side)
	$\geq 1500VAC$ (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	$\geq 100M\Omega$ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	17.8 (W) * 110 (H) * 117 (D)

### Other Ordering Information

Type	Input	Output 1	Output 2	Power Supply
NPEXA-CM3D22	4~20mA	1~5V	1~5V	Terminal
NPEXA-CM3D55	0~20mA	0~10V	0~10V	Terminal

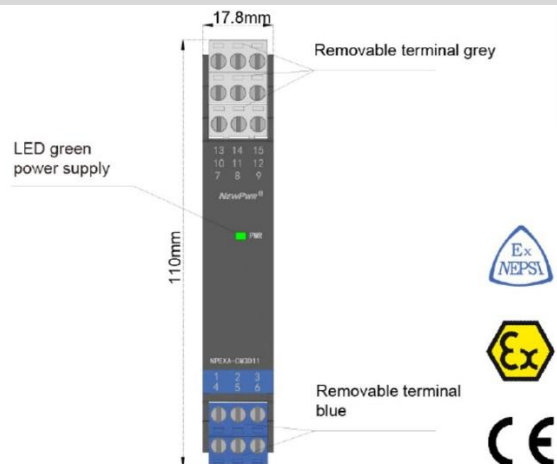

### Wiring Diagram

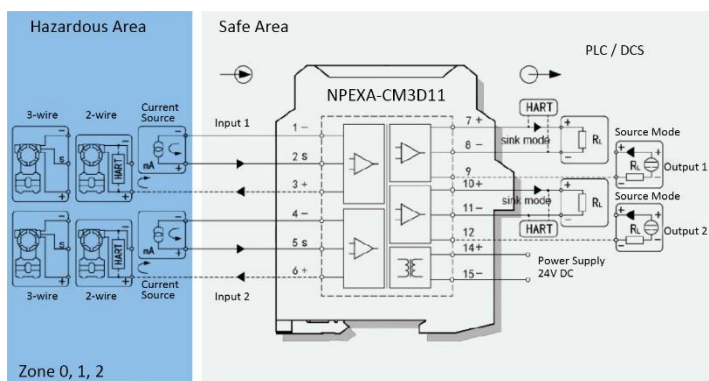

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2; 4, 5)

Uo=5 V

IIC Co= 70 μF

IIB Co= 700 μF

IIA Co= 700 μF

Certified Parameters (Terminals 2, 3; 5, 6)

Uo=28 V

Io=93 mA

Po=651 mW

IIC Co= 0.058 μF Lo=2.8 mH

IIB Co= 0.45 μF Lo=8.4 mH

IIA Co= 1.50 μF Lo=22.4 mH

# AI Isolated Safety Barrier (Sink)



## NPEXA-CM31S NPEXA-CM31S1S

Single Input, Single Output  
Single Input, Double Output


Input: 4~20mA

Output: 4~20mA (Sink Mode)


This Isolated Safety Barrier detects loop current and converts it from a hazardous area into current (sink) signals to a safe area by isolation and provides transmitter with power in the hazardous area. It allows transmission of HART communication signals. The input, output and power supply are galvanically isolated from each other.

### Parameters

<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	0.9W (24V, Single Output); 1.0W (24V, Double Output)
<b>Input Signal</b>	4~20mA, HART
<b>Input Resistance</b>	Approx. 100Ω
<b>Available Voltage</b>	Open-Circuit Voltage $\leq 26V$ Voltage $\geq 16V @ 20mA$
<b>Output Signal</b>	4~20mA (Sink), HART
<b>Load Resistance</b>	$R_L < [(U-3)/0.02]\Omega$ U: Loop Power Supply
<b>Accuracy</b>	0.1% FS
<b>Temperature Drift</b>	30 ppm/°C
<b>Response Time</b>	$\leq 2$ ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	$\geq 3000VAC$ (Intrinsically Safe Side / Non-Intrinsically Safe Side) $\geq 1500VAC$ (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	$\geq 100M\Omega$ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)

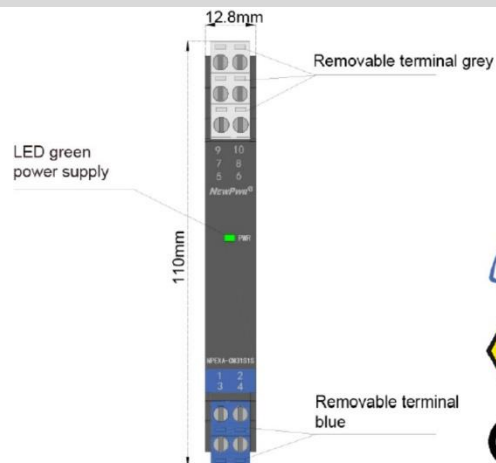

### Wiring Diagram

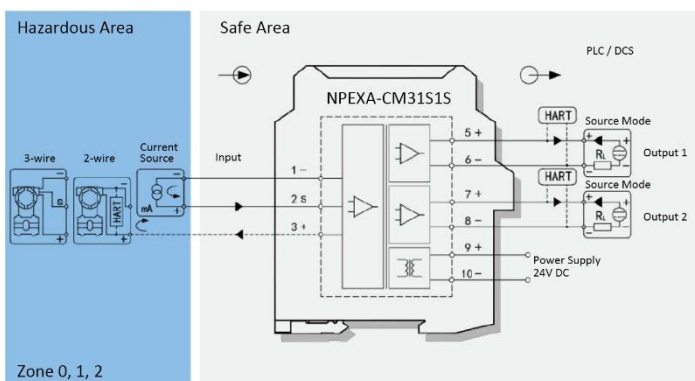

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

**Ex-Proof Grade:** [Ex ia Ga] IIC

Um: 250V

**Certified Parameters (Terminals 1, 2)**

Uo=5 V

IIC Co= 70 μF

IIB Co= 700 μF

IIA Co= 700 μF

**Certified Parameters (Terminals 2, 3)**

Uo=28 V

Io=93 mA

Po=651 mW

IIC Co= 0.058 μF Lo=2.8 mH

IIB Co= 0.45 μF Lo=8.4 mH

IIA Co= 1.50 μF Lo=22.4 mH

# AI Isolated Safety Barrier

## NPEXA-C31T1

Single Input, Double Output


Input: 4~20mA

Output: 4~20mA, RS-485


This Isolated Safety Barrier detects loop current and converts it from a hazardous area into current / voltage and RS485 signals to a safe area by isolation. It need an independent power supply. The input, output and power supply are galvanically isolated from each other. The PC or Handheld Programmer could be adopted for parameters-modification.

### Parameters

<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	1.7W
<b>Input Signal</b>	4~20mA
<b>Input Resistance</b>	Approx. 100Ω
<b>Available Voltage</b>	Open-Circuit Voltage ≤ 26V
	Voltage ≥ 16V @ 20mA
<b>Output Signal</b>	Output 1 4~20mA
	Output 2 RS485
<b>Load Resistance</b>	$R_L \leq 550\Omega$
<b>Communication Parameters</b>	Modbus RTU, Distances ≤ 1000m
<b>Communication Bandwidth</b>	≤ 19.2 kbps
<b>Accuracy</b>	0.1% F.S
<b>Temperature Drift</b>	30 ppm/°C
<b>Response Time</b>	≤ 500 ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥ 3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side)
	≥ 1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥ 100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)
<b>Output States</b>	Whatever input fault status (except breakage or short circuit, the output is 0V/mA), the output follows the input within the measuring range. The Max. Value would not exceed 110% of the upper limit of the measuring range (e.g. When the output signal type is 0~20mA, the Min. Output Value may be 0mA, the Max. Output Value would not exceed 22mA)

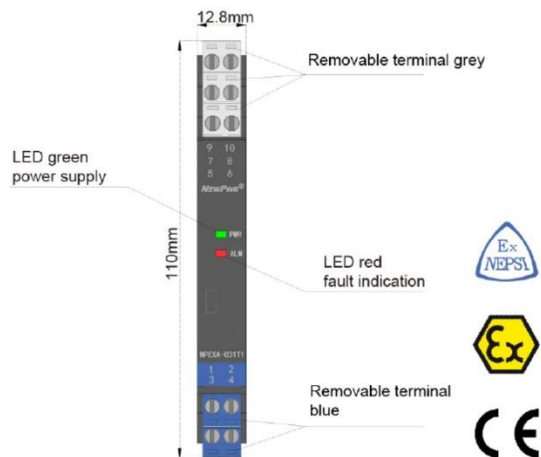

### Wiring Diagram

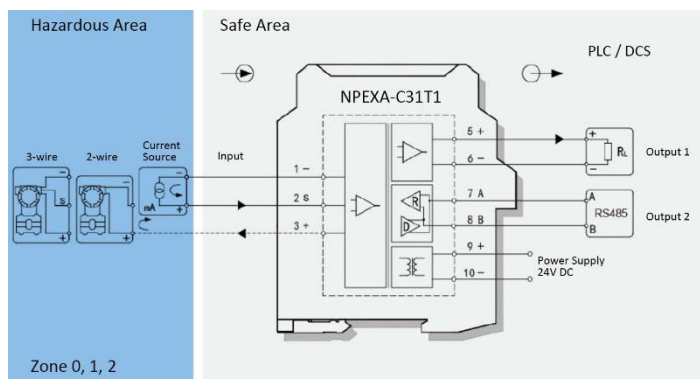

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2)

Uo=8.7 V

IIC Co= 5 μF

IIB Co= 35 μF

IIA Co= 700 μF

Certified Parameters (Terminals 1, 3)

Uo=28 V

Io=93 mA

Po=651 mW

IIC Co= 0.07 μF Lo=4.2 mH

IIB Co= 0.63 μF Lo=12.6 mH

IIA Co= 2.13 μF Lo=33.6 mH

### Model Codes

NPEXA-C3	X	T1	X
PB: BUS Powered (Default: Terminals Powered)			
The First Output Signal <sup>note 1</sup>			

Note 1: Output Signal

Number	Output Signal
1	4~20 mA
2	1~5 V
3	0~10 mA
4	0~5 V
5	0~10 V
6	0~20 mA

# AI Loop Powered



## NPEXA-CM31L

Single Input, Single Output


Input: 4~20mA

Output: 4~20mA


This Isolated Safety Barrier detects loop current and converts it from a hazardous area into current or voltage signals to a safe area by isolation. It needs loop power supply. The input, output and power supply are galvanically isolated from each other.

### Parameters

Loop Powered	12V DC~28V DC (Reverse Power Protection)
Input Signal	4~20mA
Available Voltage	$(U-6-R_L) \times 0.02$ V U is loop powered voltage
Output Signal	4~20mA
Accuracy	0.3% F.S
Temperature Drift	<100 ppm/°C
Response Time	≤0.2 ms
Electromagnetic Compatibility	IEC 61326-3-1
Dielectric Strength	≥2500VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side)
Insulation Resistance	≥100MΩ (Input / Output / Power Supply)
Operation Temperature	-20~60 °C
Storage Temperature	-40~80 °C
Dimension (mm)	17.8 (W) * 110 (H) * 117 (D)

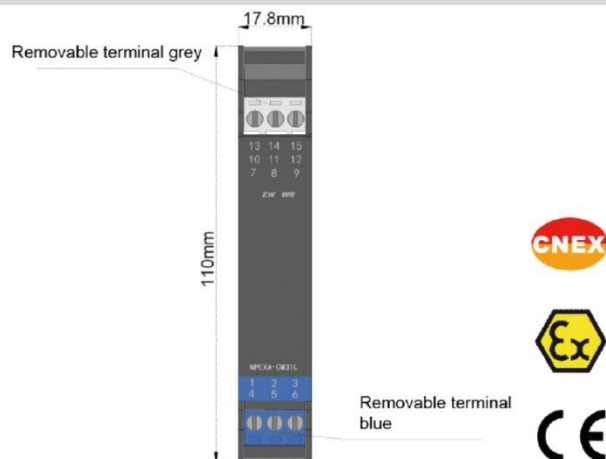

### Wiring Diagram

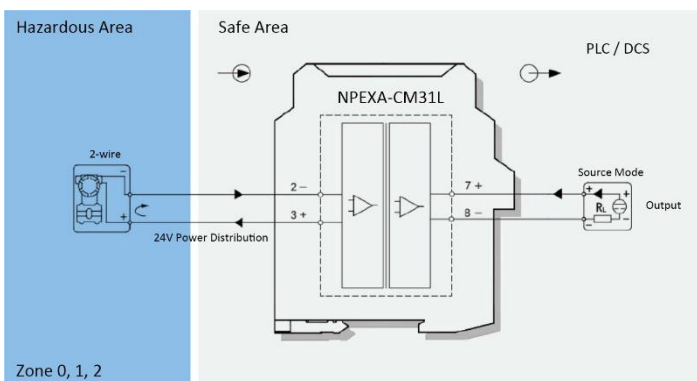

### Explosive-Proof Parameters

China National Quality Supervision & Test Centre for Explosion Protected Electrical Products (CQST)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 2, 3)

Uo=28 V	Io=93 mA	Po=650 mW
IIC	Co= 0.058 μF	Lo=2.8 mH
IIB	Co= 0.45 μF	Lo=8.4 mH
IIA	Co= 1.50 μF	Lo=22.4 mH

# AI Isolated Safety Barrier

## NPEXA-KM31

Single Input, Single Output


Input: 4~20mA

Output: 4~20mA


This Isolated Safety Barrier detects loop current and converts it from a hazardous area into current or voltage signals to a safe area by isolation and provides transmitter with power in the hazardous area. It allows transmission of HART communication signals. The input, output and power supply are galvanically isolated from each other.

### Parameters

<b>Power Supply</b>	20V DC~30V DC (Reverse Power Protection)
<b>Power Dissipation</b>	≤ 1.2W
<b>Input Signal</b>	4~20mA, HART
<b>Input Resistance</b>	≤ 120Ω
<b>Available Voltage</b>	Open-Circuit Voltage ≤ 26V Voltage ≥ 16V @ 20mA
<b>Output Signal</b>	4~20mA, HART
<b>Load Resistance</b>	$R_L \leq 350\Omega$
<b>Accuracy</b>	0.1% F.S
<b>Temperature Drift</b>	50 ppm/°C
<b>Response Time</b>	≤ 20 ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥2500VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)
<b>Output States</b>	The output signal is less than 3.6 mA or greater than 21.5 mA

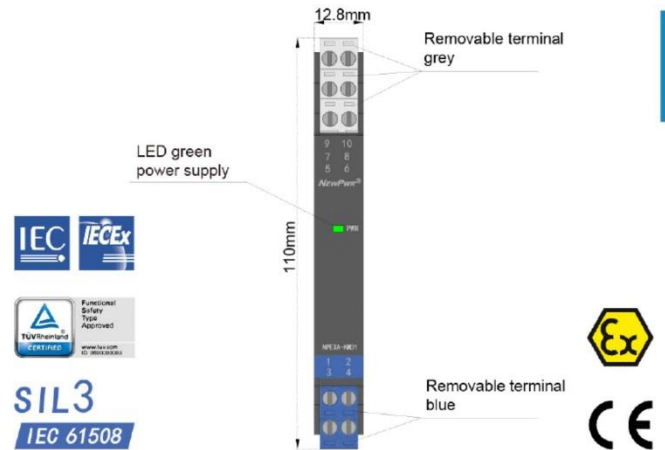

### Wiring Diagram

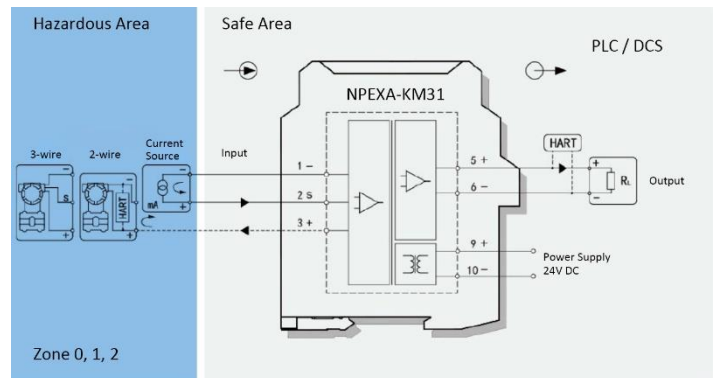

### Explosive-Proof Parameters

Germany TÜV (TÜV Rheinland)

Functional Safety Level (SIL): SIL3, SC3 according to IEC 61508

Ex-Marking EU:  $\text{Ex II (1) G [Ex ia Ga] IIC}$

IECEx: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2)

$U_o=5\text{ V}$        $I_o=0.8\text{ mA}$        $P_o=1\text{ mW}$

IIC       $C_o=99.9\ \mu\text{F}$        $L_o=1\text{ H}$

IIB       $C_o=999\ \mu\text{F}$        $L_o=1\text{ H}$

IIA       $C_o=999\ \mu\text{F}$        $L_o=1\text{ H}$

Certified Parameters (Terminals 2, 3)

$U_o=28\text{ V}$        $I_o=93\text{ mA}$        $P_o=651\text{ mW}$

IIC       $C_o=0.083\ \mu\text{F}$        $L_o=4.2\text{ mH}$

IIB       $C_o=0.65\ \mu\text{F}$        $L_o=12.6\text{ mH}$

IIA       $C_o=2.15\ \mu\text{F}$        $L_o=33.6\text{ mH}$

# AO Isolated Safety Barrier

## NPEXB-KM31

Single Input, Single Output


Input: 4~20mA

Output: 4~20mA


It accepts 4~20mA signal from safe area to drive executive mechanisms in hazardous area, and allows the transmission of HART communication signals. The input, output and power supply are galvanically isolated from each other. The function of LFD is by detecting the output load resistance.

### Parameters

<b>Power Supply</b>	20V DC~30V DC (Reverse Power Protection)
<b>Power Dissipation</b>	1.1 W
<b>Input Signal</b>	4~20mA, HART
<b>Output Signal</b>	4~20mA, HART
<b>Load Resistance</b>	80~800Ω
<b>Input Voltage Drop</b>	≤ 1.2V
<b>Line Failure State</b>	When the output load resistance was detected less than 80Ω, the output is in the fault of short circuit. When the output load resistance was detected more than 6000Ω, the output is in the fault of line breakage. If the output is in the fault, the input current value is limited to within 1mA and the output current value is limited to 3mA
<b>Accuracy</b>	0.1% FS
<b>Temperature Drift</b>	50 ppm/°C
<b>Response Time</b>	≤120 ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥2500VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)
<b>Safe States</b>	The output signal is less than 3.6mA or greater than 21.5mA

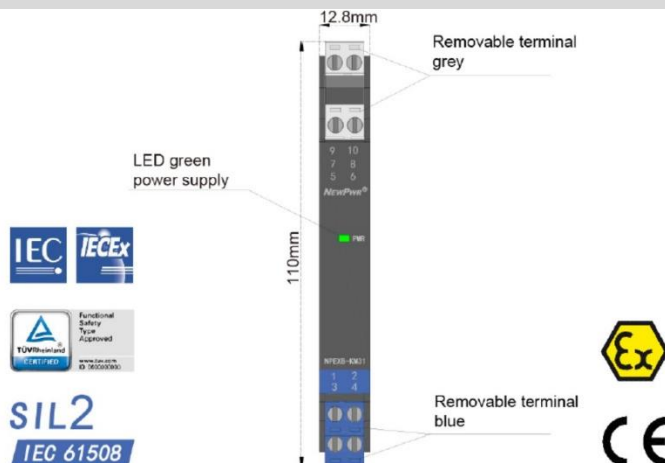

### Wiring Diagram

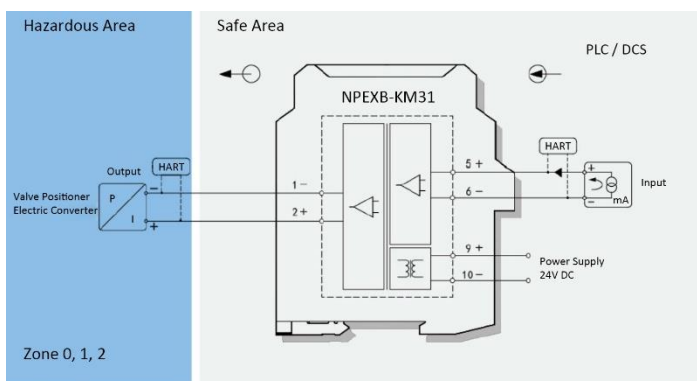

### Explosive-Proof Parameters

Germany TÜV (TÜV Rheinland)

Functional Safety Level (SIL): SIL2, SC3 according to IEC 61508

EU: II (1) G [Ex ia Ga] IIC  
IECEX: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2)

Uo=25.2 V	Io=93 mA	Po=586 mW
IIC Co= 0.107 μF	Lo=4.2 H	
IIB Co= 0.82 μF	Lo=12.6 H	
IIA Co= 2.9 μF	Lo=33.6 H	

# AO Isolated Safety Barrier

## NPEXB-CM3D11

Double Input, Double Output


Input: 4~20mA

Output: 4~20mA


It accepts 4~20mA signal from safe area to drive executive mechanisms in hazardous area, and allows the transmission of HART communication signals. The input, output and power supply are galvanically isolated from each other.

### Parameters

<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	2.2 W
<b>Input Signal</b>	4~20mA, HART
<b>Output Signal</b>	4~20mA, HART
<b>Load Resistance</b>	$R_L \leq 800\Omega$
<b>Input Voltage Drop</b>	$\leq 1.2V$
<b>Accuracy</b>	0.1% F.S
<b>Temperature Drift</b>	30 ppm/°C
<b>Response Time</b>	$\leq 2$ ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	$\geq 2500VAC$ (Intrinsically Safe Side / Non-Intrinsically Safe Side) $\geq 1500VAC$ (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	$\geq 100M\Omega$ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)

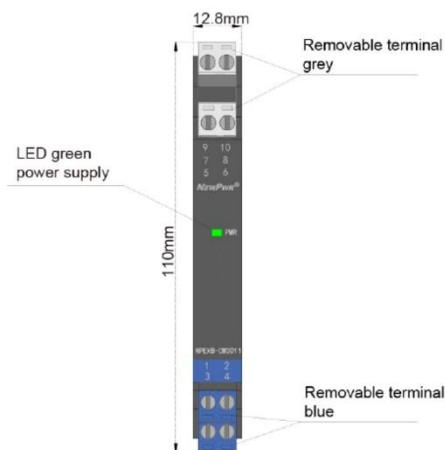

### Wiring Diagram

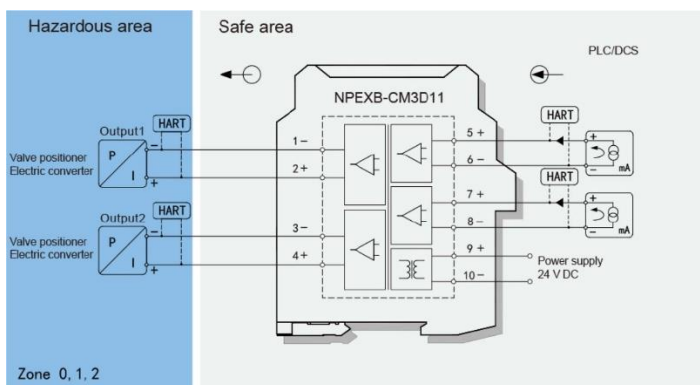

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation

(NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2, 3, 4)

Uo=27.3 V	Io=92 mA	Po=628 mW
IIC	Co= 0.043 $\mu F$	Lo=4.7 mH
IIB	Co= 0.63 $\mu F$	Lo=14.1 mH
IIA	Co= 2.23 $\mu F$	Lo=37.6 mH

# AO Loop Powered



## NPEXB-CM31L

Single Input, Single Output


Input: 4~20mA

Output: 4~20mA


It accepts 4~20mA signal from safe area to drive executive mechanisms in hazardous area, and allows the transmission of HART communication signals. It needs loop power supply. The input and output are galvanically isolated from each other.

### Parameters

<b>Power Supply</b>	8V DC~28V DC (Reverse Power Protection)
<b>Input Signal</b>	4~20mA, HART
<b>Output Signal</b>	4~20mA, HART
<b>Load Resistance</b>	$R_L \leq [(U-8)/0.02]\Omega$ U is loop powered voltage
<b>Accuracy</b>	0.1% F.S
<b>Temperature Drift</b>	100 ppm/°C
<b>Response Time</b>	≤0.2 ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥2500VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	17.8 (W) * 110 (H) * 117 (D)

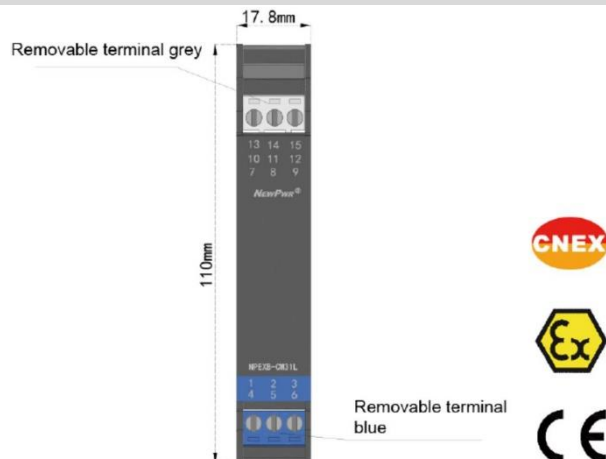

### Wiring Diagram

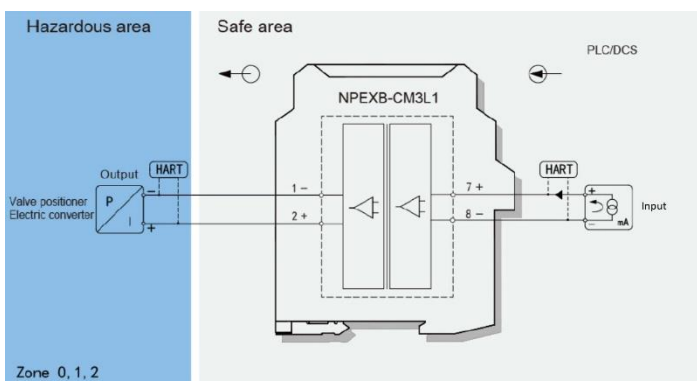

### Explosive-Proof Parameters

China National Quality Supervision & Test Centre for Explosion Protected Electrical Products (CQST)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2)

Uo=25.2 V	Io=85 mA	Po=536 mW
IIC Co= 0.074 μF	Lo=3.4 mH	
IIB Co= 0.57 μF	Lo=10.2 mH	
IIA Co= 2.03 μF	Lo=27.2 mH	

# Voltage Isolated Safety Barrier

## NPEXA-CM41 NPEXA-CM411

Single Input, Single Output

Single Input, Double Output

Input: 1~5V

Output: 4~20mA


This isolated safety barrier detects loop voltage and converts it from a hazardous area into current signals to a safe area by isolation, and also provides transmitters with power in the hazardous area. The input, output and power supply are galvanically isolated from each other.

### Parameters


<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	1.3 W (24V, Single Output); 1.8 W (24V, Double Output)
<b>Input Signal</b>	1~5 V
<b>Input Resistance</b>	≥1 MΩ
<b>Available Voltage</b>	Open-Circuit Voltage ≤ 26V Voltage ≥ 16V @ 20mA
<b>Output Signal</b>	4~20mA
<b>Load Resistance</b>	RL ≤ 500Ω
<b>Accuracy</b>	0.1% F.S
<b>Temperature Drift</b>	30 ppm/°C
<b>Response Time</b>	≤2 ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)

### Other Ordering Information

Type	Input	Output 1	Output 2	Power Supply
NPEXA-CM42	1~5V	1~5V	-----	Terminal
NPEXA-CM45	0~5V	0~10V	-----	Terminal
NPEXA-CM412	1~5V	4~20mA	1~5V	Terminal
NPEXA-CM422	1~5V	1~5V	1~5V	Terminal
NPEXA-CM455	0~10V	0~10V	0~10V	Terminal

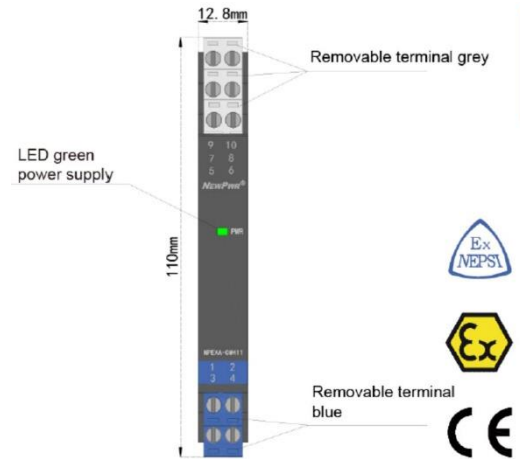

### Wiring Diagram

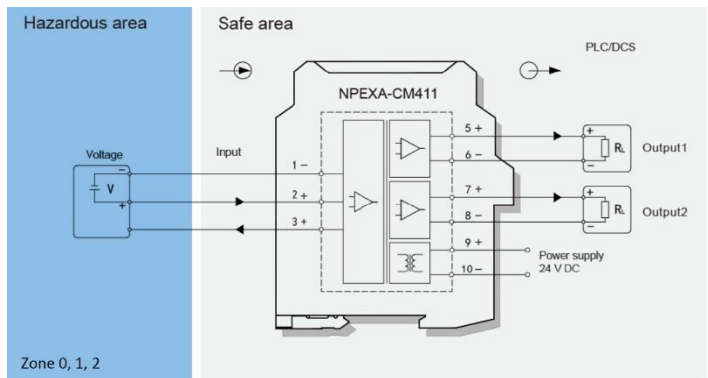

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation

(NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2)

IIC Co= 70 μF

IIB Co= 700 μF

IIA Co= 700 μF

Certified Parameters (Terminals 2,3)

Uo=28 V

Io=93 mA

Po=651 mW

IIC Co= 0.058 μF

Lo= 2.8 mH

IIB Co= 0.45 μF

Lo= 8.4 mH

IIA Co= 1.50 μF

Lo= 22.4 mH

# DI Isolated Safety Barrier

## NPEXA-K51 NPEXA-K511

Single Input, Single Output  
Single Input, Double Output

Input: Dry Contact or Proximity Switch  
Output: Relay

This type of isolated safety barrier transmits digital signals (dry contact or proximity switch) from hazardous area to safe area. The normal output state and line fault detection function can be set with the DIP switch on the front side. The input, output and power supply are galvanically isolated from each other.


### Parameters

<b>Power Supply</b>	20V DC~30V DC (Reverse Power Protection)
<b>Power Dissipation</b>	1 W
<b>Input Signal</b>	Dry Contact or NAMUR
<b>Switching Trigger Point</b>	Input Signal>2.1 mA, Signal "1", the yellow LED is always bright Input Signal<1.2 mA, Signal "0", the yellow LED goes out
<b>Open-Circuit Voltage</b>	Approx. 9.2V
<b>Short-Circuit Current</b>	Approx. 9mA
<b>Output Signal</b>	Relay Contact
<b>Local Capacity</b>	250VAC/2A, 30VDC/2A
<b>LED Function</b>	When input current $\leq 80\mu\text{A}$ , consider the input line breakdown, the apparatus enters into safe function state, the output relay de-energized If input current $\geq 6\text{mA}$ , consider the input circuit short-circuit, the apparatus enters into safe function state, the output relay de-energized. The indicator red flashing.
<b>Relay Mechanical Life</b>	>100000 Switching Cycles
<b>Switch Frequency</b>	<10Hz
<b>Energized / De-Energized Delay</b>	<20ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	$\geq 2500\text{VAC}$ (Intrinsically Safe Side / Non-Intrinsically Safe Side) $\geq 1500\text{VAC}$ (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	$\geq 100\text{M}\Omega$ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)
<b>Safe State</b>	Power Off


### DIP Switch Settings

NPEXA-CS12 / NPEXA (NPEXA-CS12 can set S1, S2)

Switch State	a	b
S1	Output1 Normal Mode	Inverted Mode
S2	LFD ON	LFD OFF
S3	Output2 Normal Mode	LFD ON

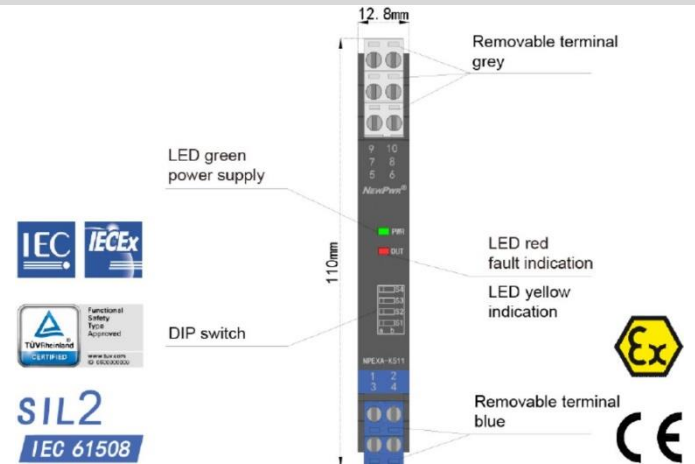

### Wiring Diagram

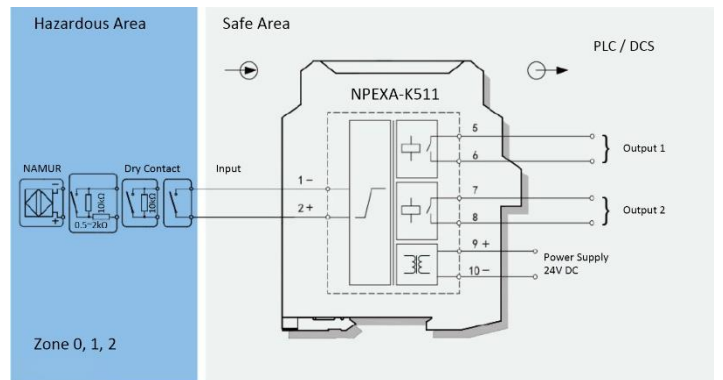

### Explosive-Proof Parameters

Germany TÜV (TÜV Rheinland)

Functional Safety Level (SIL): SIL2, SC3 according to IEC 61508

EU:  $\text{Ex} \text{II} (1) \text{G} [\text{Ex ia Ga}] \text{IIC}$

Ex-Marking

IECEX: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2)

$U_0=10.5 \text{ V}$   $I_0=11.3 \text{ mA}$   $P_0=29.7 \text{ mW}$

IIC  $C_0=0.644 \mu\text{F}$   $L_0=35.255 \text{ mH}$

IIB  $C_0=11 \mu\text{F}$   $L_0=105 \text{ mH}$

IIA  $C_0=52 \mu\text{F}$   $L_0=282 \text{ mH}$

# DI Isolated Safety Barrier

## NPEXA-K5D11

Double Input, Double Output

Input: Dry Contact or Proximity Switch

Output: Relay

This type of isolated safety barrier transmits digital signals (dry contact or proximity switch) from hazardous area to safe area. The normal output state and line fault detection function can be set with the DIP switch on the front side. The input, output and power supply are galvanically isolated from each other.


### Parameters

<b>Power Supply</b>	20V DC~30V DC (Reverse Power Protection)
<b>Power Dissipation</b>	1 W
<b>Input Signal</b>	Dry Contact or NAMUR
<b>Switching Trigger Point</b>	Input Signal>2.1 mA, Signal "1", the yellow LED is always bright Input Signal<1.2 mA, Signal "0", the yellow LED goes out
<b>Open-Circuit Voltage</b>	Approx. 9.2V
<b>Short-Circuit Current</b>	Approx. 9mA
<b>Output Signal</b>	Relay Contact
<b>Local Capacity</b>	250VAC/2A, 30VDC/2A
<b>LED Function</b>	When input current $\leq 80\mu\text{A}$ , consider the input line breakdown, the apparatus enters into safe function state, the output relay de-energized  If input current $\geq 6\text{mA}$ , consider the input circuit short-circuit, the apparatus enters into safe function state, the output relay de-energized. The indicator red flashing.
<b>Relay Mechanical Life</b>	>100000 Switching Cycles
<b>Switch Frequency</b>	<10Hz
<b>Energized / De-Energized Delay</b>	<20ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	$\geq 2500\text{VAC}$ (Intrinsically Safe Side / Non-Intrinsically Safe Side) $\geq 1500\text{VAC}$ (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	$\geq 100\text{M}\Omega$ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)
<b>Safe State</b>	Power Off


### DIP Switch Settings

NPEXA-CS12 / NPEXA (NPEXA-CS12 can set S1, S2)

Switch State	a	b
S1	Output1 Normal Mode	Output1 Inverted Mode
S2	Output1 LFD ON	Output1 LFD OFF
S3	Output2 Normal Mode	Output2 Inverted Mode
S4	Output2 LFD ON	Output2 LFD OFF

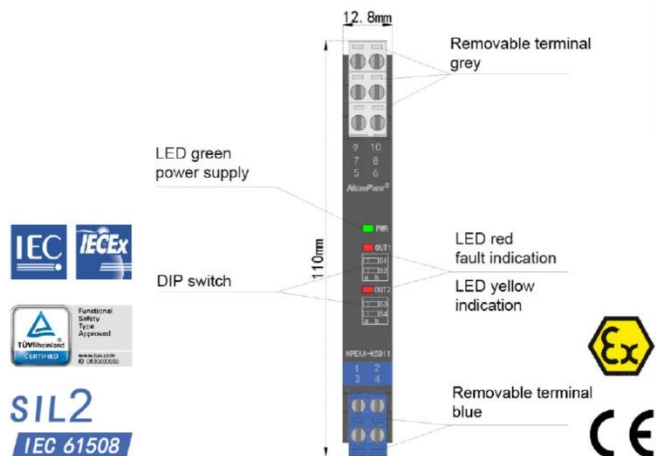

### Wiring Diagram

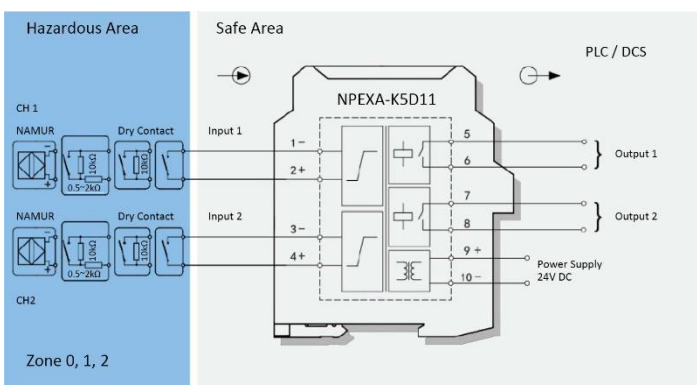

### Explosive-Proof Parameters

Germany TÜV (TÜV Rheinland)

Functional Safety Level (SIL): SIL2, SC3 according to IEC 61508

Ex-Marking EU:  $\text{Ex} \text{II} (1) \text{G} [\text{Ex ia Ga}] \text{IIC}$

IECEx:  $[\text{Ex ia Ga}] \text{IIC}$

Um: 250V

Certified Parameters (Terminals 1, 2; 3, 4)

Uo=10.5 V	Io=11.3 mA	Po=29.7 mW
IIC Co= 0.644 $\mu\text{F}$	Lo=78.8 mH	
IIB Co= 11 $\mu\text{F}$	Lo=236 mH	
IIA Co= 52 $\mu\text{F}$	Lo=630 mH	

# DI Isolated Safety Barrier

## NPEXA-C512 NPEXA-C5122

Single Input, Single Output  
Single Input, Double Output

Input: Dry Contact or Proximity Switch

Output: Transistor

This isolated safety barrier converts switch or proximity detector signals (dry contact or NAMUR) from a hazardous area into transistor signals to a safe area by isolation. Operation mode, the second output function (as a transistor output or a fault output) and the input circuit fault detection can be set with the DIP switch on the front side. The input, output and power supply are galvanically isolated from each other.


### Parameters

<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	1 W
<b>Input Signal</b>	Dry Contact or NAMUR
<b>Switching Trigger Point</b>	Input Signal>2.1 mA, Signal "1", the yellow LED is always bright Input Signal<1.2 mA, Signal "0", the yellow LED goes out
<b>Open-Circuit Voltage</b>	Approx. 8.5V
<b>Short-Circuit Current</b>	Approx. 8.5mA
<b>Output Signal</b>	Transistor
<b>Sink Current</b>	≤40mA
<b>External Voltage</b>	<40V DC
<b>LED Function</b>	When input current≤80μA, consider the input line breakdown, the apparatus enters into safe function state, the output transistor de-energized; If input current≥6mA, consider the input circuit short-circuit, the apparatus enters into safe function state, the output transistor de-energized. The indicator red flashing.
<b>Switch Frequency</b>	<5kHz
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥2500VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)


### DIP Switch Settings

NPEXA-C512 / NPEXA (NPEXA-C512 can set S1, S2)

Switch State	a	b
S1	Output1 Normal Mode	Inverted Mode
S2	LFD ON	LFD OFF
S3	Output2 Normal Mode	LFD ON

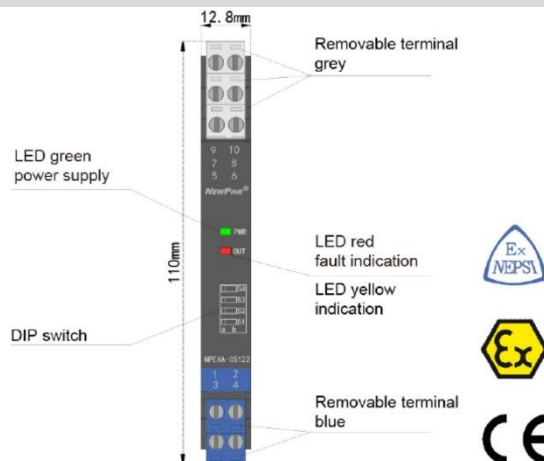

### Wiring Diagram

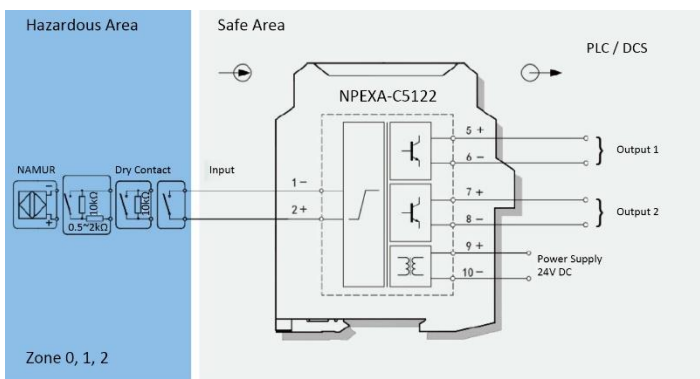

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2)

Uo=10.5 V	Io=11.3 mA	Po=29.7 mW
IIC Co= 0.97 μF	Lo= 100 mH	
IIB Co= 11 μF	Lo= 300 mH	
IIA Co= 52 μF	Lo= 700 mH	

# DI Isolated Safety Barrier

## NPEXA-C5D122

Double Input, Double Output

Input: Dry Contact or Proximity Switch

Output: Transistor


This type of isolated safety barrier transmits digital signals (dry contact or proximity switch) from hazardous area to safe area. The normal output state and line fault detection function can be set with the DIP switch on the front side. The input, output and power supply are galvanically isolated from each other.

### Parameters


<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	1 W
<b>Input Signal</b>	Dry Contact or NAMUR
<b>Switching Trigger Point</b>	Input Signal > 2.1 mA, Signal "1", the yellow LED is always bright Input Signal < 1.2 mA, Signal "0", the yellow LED goes out
<b>Open-Circuit Voltage</b>	Approx. 8.5V
<b>Short-Circuit Current</b>	Approx. 8.5mA
<b>Output Signal</b>	Transistor
<b>Sink Current</b>	≤ 40mA
<b>External Voltage</b>	< 40V DC
<b>LED Function</b>	When input current ≤ 80μA, consider the input line breakdown, the apparatus enters into safe function state, the output transistor de-energized; If input current ≥ 6mA, consider the input circuit short-circuit, the apparatus enters into safe function state, the output transistor de-energized. The indicator red flashing.
<b>Switch Frequency</b>	< 5kHz
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥ 2500VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥ 1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥ 100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)

### DIP Switch Settings

Switch State	a	b
S1	Output1 Normal Mode	Output1 Inverted Mode
S2	Output1 LFD ON	Output1 LFD OFF
S3	Output2 Normal Mode	Output2 Inverted Mode
S4	Output2 LFD ON	Output2 LFD OFF

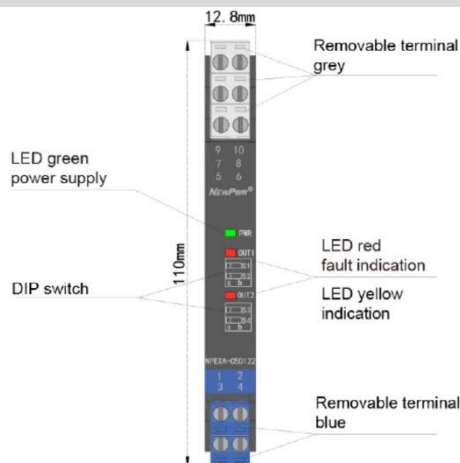

### Wiring Diagram

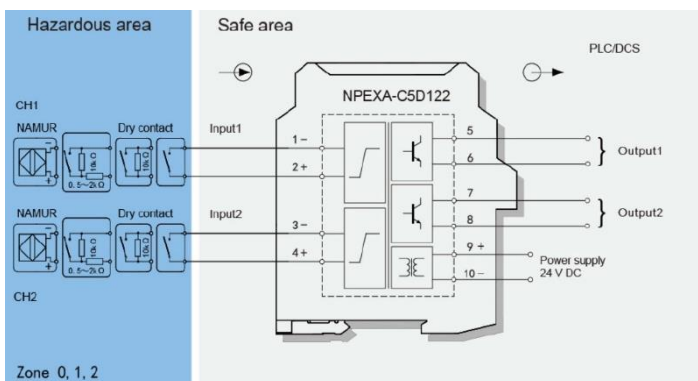

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2; 3, 4)

Uo=10.5 V	Io=11.3 mA	Po=29.7 mW
IIC	Co= 0.97 μF	Lo= 100 mH
IIB	Co= 11 μF	Lo= 300 mH
IIA	Co= 52 μF	Lo= 700 mH

# DO Isolated Safety Barrier



## NPEXB-C512 NPEXB-C5D12

Single Input, Single Output  
Double Input, Double Output

Input: Dry Contact  
Output: 45mA


By switch signal controlling, transfers the digital signals (dry contact) from safe area into current signals to hazardous area, and drives field devices like intrinsically safe valves, audible alarms, etc.

The input, output and power supply are galvanically isolated from each other.


### Parameters

<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	≤1.4 W (24V, Single Output); ≤2.8 W (24V, Double Output)
<b>Input Signal</b>	Dry Contact
<b>Output Voltage</b>	> 11.25V DC
<b>Open-Circuit Voltage</b>	21.5 V DC
<b>Open-Current</b>	≤ 45mA


Output Equivalent Circuit




Output Characteristics Diagram



<b>Response Time</b>	< 20ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)

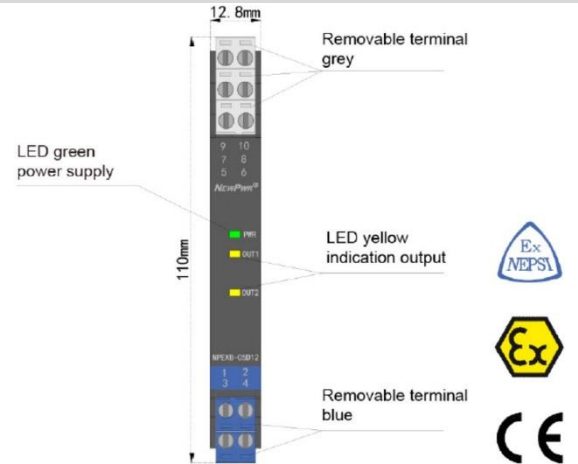

### Wiring Diagram

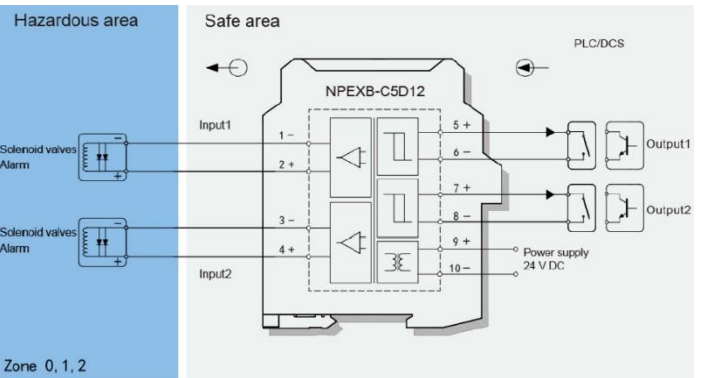

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2; 3, 4)

Uo=25.2 V	Io=117 mA	Po=738 mW
IIC	Co= 0.107 μF	Lo= 1.5 mH
IIB	Co= 0.82 μF	Lo= 4.5 mH
IIA	Co= 2.9 μF	Lo= 12 mH

# DO Loop Powered

## NPEXB-C512L NPEXB-C5D12L

Single Input, Single Output  
Double Input, Double Output

Input: Wet Contact  
Output: 45mA


By switch signal controlling, transfers the digital signals (wet contact) from safe area into current signals to hazardous area, and drives field devices like intrinsically safe valves, audible alarms, etc.

The input and output are galvanically isolated from each other.


### Parameters

<b>Power Supply</b>	12V DC~30V DC (Reverse Power Protection)
<b>Power Dissipation</b>	≤1.4 W (24V, Single Output); ≤2.8 W (24V, Double Output)
<b>Input Signal</b>	Wet Contact
<b>Output Voltage</b>	> 11.25V DC
<b>Open-Circuit Voltage</b>	21.5 V DC
<b>Open-Current</b>	≤ 45mA


Output Equivalent Circuit




Output Characteristics Diagram



<b>Response Time</b>	< 20ms
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)

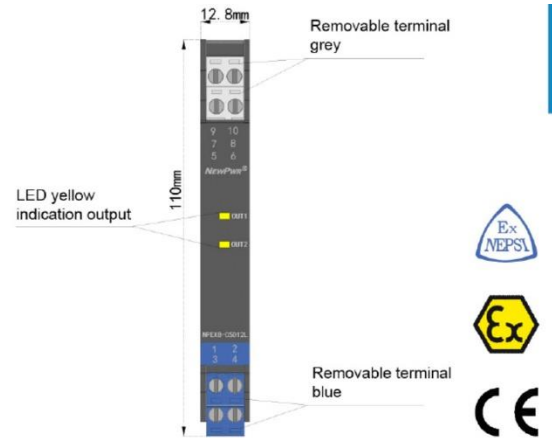

### Wiring Diagram

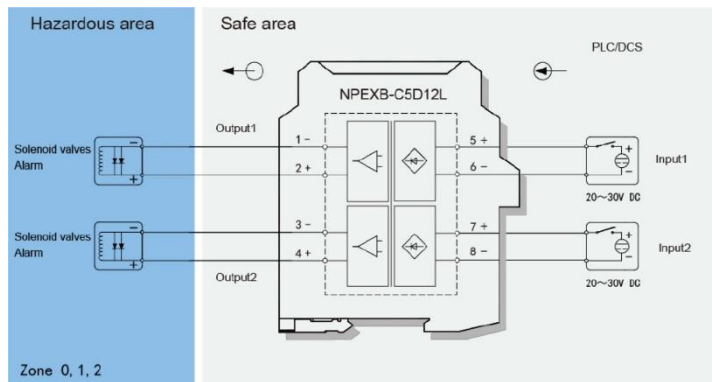

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2; 3, 4)

Uo=25.2 V	Io=117 mA	Po=738 mW
IIC	Co= 0.107 μF	Lo= 1.5 mH
IIB	Co= 0.82 μF	Lo= 4.5 mH
IIA	Co= 2.9 μF	Lo= 12 mH

# DO Loop Powered



## NPEXB-K512L

Single Input, Single Output

Input: Wet Contact

Output: 45mA

By switch signal controlling, transfers the digital signals (wet contact) from safe area into current signals to hazardous area, and drives field devices like intrinsically safe valves, audible alarms, etc.

The input and output are galvanically isolated from each other.

### Parameters

**Power Supply** 12V DC~30V DC (Reverse Power Protection)

**Power Dissipation** ≤1.4 W


**Input Signal** Wet Contact

**Output Voltage** > 11.25V DC


**Open-Circuit Voltage** 21.6 V DC

**Open-Current** ≤ 45mA

Output Equivalent Circuit



Output Characteristics Diagram



**Response Time** < 20ms

**Electromagnetic Compatibility** IEC 61326-3-1

**Dielectric Strength** ≥2500VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side)


**Insulation Resistance** ≥100MΩ (Input / Output / Power Supply)

**Operation Temperature** -20~60 °C


**Storage Temperature** -40~80 °C

**Dimension (mm)** 12.8 (W) \* 110 (H) \* 117 (D)

**Safe States** Power OFF

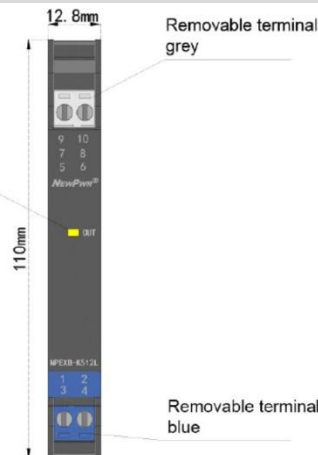

### Wiring Diagram

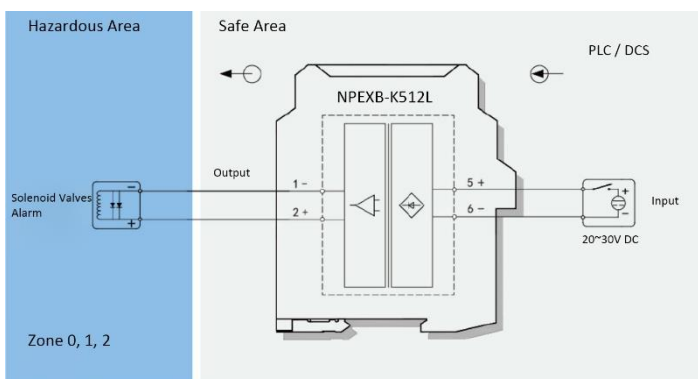

### Explosive-Proof Parameters

Germany TÜV (TÜV Rheinland)

Functional Safety Level (SIL): SIL3, SC3 according to IEC 61508

EU: II (1) G [Ex ia Ga] IIC

Ex-Marking IECEx: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2)

Uo=25.2 V      Io=116 mA      Po=731 mW

IIC      Co= 0.107 μF      Lo=2.6 mH

IIB      Co= 0.82 μF      Lo=7.8 mH

IIA      Co= 2.9 μF      Lo=20.8 mH

# Frequency Isolated Safety Barrier

## NPEXA-C61P1 NPEXA-C611P1


Single Input, Single Output  
Single Input, Double Output

Input: Frequency  
Output: 4~20 mA


This Isolated Safety Barrier converts the frequency signals from a hazardous area into current or voltage signals to a safe area by isolation. The input, output and power supply are galvanically isolated from each other. The PC or Handheld Programmer could be adopted for parameters-modification.

### Parameters

Power Supply	18V DC~60V DC (Reverse Power Protection)
Power Dissipation	0.8 W (Single Output); 1.3 W (Double Output)
Input Signal	Frequency
Frequency Range	0.1Hz~100kHz
Pulse Width	≥ 5μs
Input Impedance	≥ 3kΩ
Switching Trigger Point	Low Level: 0V~2V; High Level: 4V~30V
Distribution Voltage	≥ 9V, when loaded with 20mA
Output Signal	4~20mA
Load Resistance	$R_L \leq 550\Omega$
Accuracy	0.1% F.S
Temperature Drift	30 ppm/°C
Response Time	≤ 500ms
Electromagnetic Compatibility	IEC 61326-3-1
Dielectric Strength	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
Insulation Resistance	≥100MΩ (Input / Output / Power Supply)
Operation Temperature	-20~60 °C
Storage Temperature	-40~80 °C
Dimension (mm)	12.8 (W) * 110 (H) * 117 (D)
Fault States	Input signal state indicator (red), it remains bright when input over-range. It flickers when input breakage.

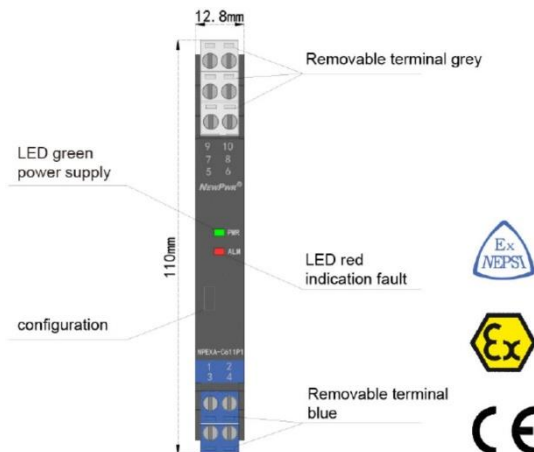

### Wiring Diagram

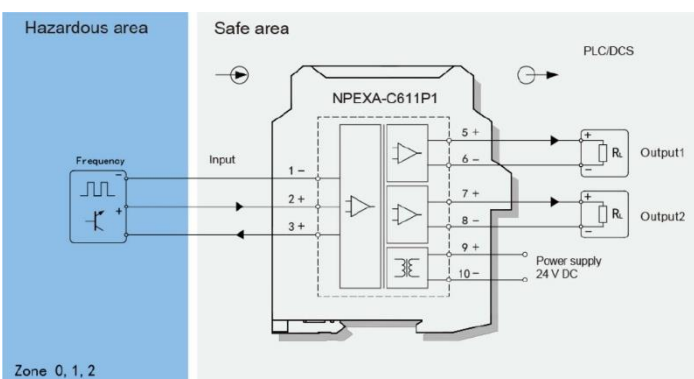

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

#### Certified Parameters (Terminals 1, 2)

Uo=8.7 V	Io=1 mA	Po=3 mW
IIC	Co= 5 μF	Lo= 1000 mH
IIB	Co= 35 μF	Lo= 1000 mH
IIA	Co= 700 μF	Lo= 1000 mH

#### Certified Parameters (Terminals 1, 3)

Uo=15.8 V	Io=107 mA	Po=423 mW
IIC	Co= 0.478 μF	Lo= 1.8 mH
IIB	Co= 2.88 μF	Lo= 5.4 mH
IIA	Co= 11.6 μF	Lo= 14.4 mH

### Model Codes

NPEXA-C6	X	X	P1	X
PB: BUS Powered (Default: Terminals Powered)				
The Second Output Signal <sup>note 1</sup>				
The First Output Signal <sup>note 1</sup>				

Note 1: Output Signal

Number	Output Signal
1	4~20 mA
2	1~5 V
3	0~10 mA
4	0~5 V
5	0~10 V
6	0~20 mA

# Frequency Isolated Safety Barrier



## NPEXA-C61P2 NPEXA-C611P2

Single Input, Single Output  
Single Input, Double Output

Input: Frequency  
Output: 4~20 mA

This Isolated Safety Barrier converts the frequency signals from a hazardous area into current or voltage signals to a safe area by isolation. The input, output and power supply are galvanically isolated from each other. The PC or Handheld Programmer could be adopted for parameters-modification.


### Parameters

Power Supply	18V DC~60V DC (Reverse Power Protection)
Power Dissipation	0.8 W (Single Output); 1.3 W (Double Output)
Input Signal	Frequency
Frequency Range	0.1Hz~100kHz
Pulse Width	≥ 5μs
Input Impedance	≥ 3kΩ
Switching Trigger Point	Low Level: 0V~2V; High Level: 4V~30V
Distribution Voltage	≥ 16V, when loaded with 20mA
Output Signal	4~20mA
Load Resistance	$R_L \leq 550\Omega$
Accuracy	0.1% F.S
Temperature Drift	30 ppm/°C
Response Time	≤ 500ms
Electromagnetic Compatibility	IEC 61326-3-1
Dielectric Strength	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
Insulation Resistance	≥100MΩ (Input / Output / Power Supply)
Operation Temperature	-20~60 °C
Storage Temperature	-40~80 °C
Dimension (mm)	12.8 (W) * 110 (H) * 117 (D)
Fault States	Input signal state indicator (red), it remains bright when input over-range. It flickers when input breakage.


### Model Codes

NPEXA-C6	X	X	P2	X
PB: BUS Powered (Default: Terminals Powered)				
The Second Output Signal <sup>note 1</sup>				
The First Output Signal <sup>note 1</sup>				

Note 1: Output Signal

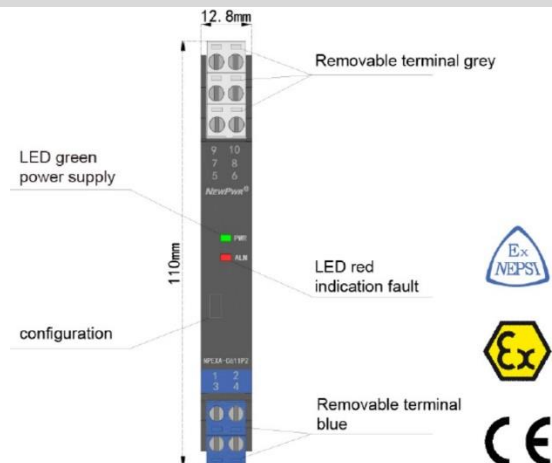

### Wiring Diagram

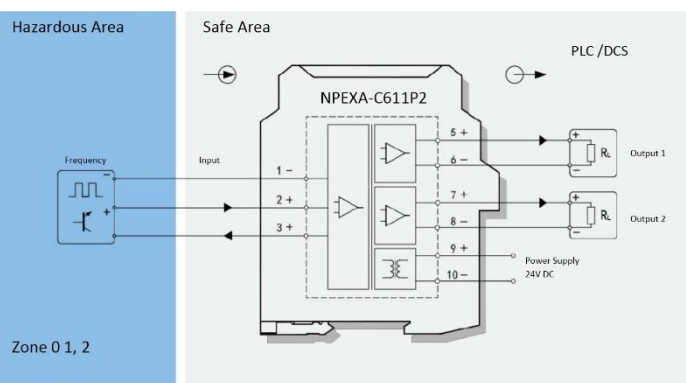

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

#### Certified Parameters (Terminals 1, 2)

Uo=8.7 V	Io=1 mA	Po=3 mW
IIC	Co= 5 μF	Lo= 1000 mH
IIB	Co= 35 μF	Lo= 1000 mH
IIA	Co= 700 μF	Lo= 1000 mH

#### Certified Parameters (Terminals 1, 3)

Uo=28 V	Io=93 mA	Po=651 mW
IIC	Co= 0.08 μF	Lo= 4.2 mH
IIB	Co= 0.68 μF	Lo= 12.6 mH
IIA	Co= 2.27 μF	Lo= 33.6 mH

Number	Output Signal
1	4~20 mA
2	1~5 V
3	0~10 mA
4	0~5 V
5	0~10 V
6	0~20 mA

# Frequency Isolated Safety Barrier

## NPEXA-C67P1 NPEXA-C677P1


Single Input, Single Output  
Single Input, Double Output

Input: Frequency  
Output: 1:1


This Isolated Safety Barrier converts the frequency signals from a hazardous area to a safe area by isolation. The input, output and power supply are galvanically isolated from each other.

### Parameters

<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)	
<b>Power Dissipation</b>	0.9 W (Single Output); 1.8 W (Double Output)	
<b>Input Signal</b>	Frequency	
<b>Frequency Range</b>	0.1Hz~100kHz	
<b>Pulse Width</b>	≥ 5μs	
<b>Switching Trigger Point</b>	Low Level: 0V~2V; High Level: 4V~30V	
<b>Distribution Voltage</b>	≥ 9V, when loaded with 20mA	
<b>Output Signal</b>	Open Collector	High Level: Vcc (≤ 30V)
		Low Level: ≤ 2V
	Emitter Follower	High Level: Vcc-2V
		Low Level: ≤ 0.5V
	Logic Level	High Level: 9V ≤ VH ≤ 12V
		Low Level: VL ≤ 2V
		Load Resistance: ≥ 1kΩ
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1	
<b>Dielectric Strength</b>	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side)	
	≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)	
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)	
<b>Operation Temperature</b>	-20~60 °C	
<b>Storage Temperature</b>	-40~80 °C	
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)	

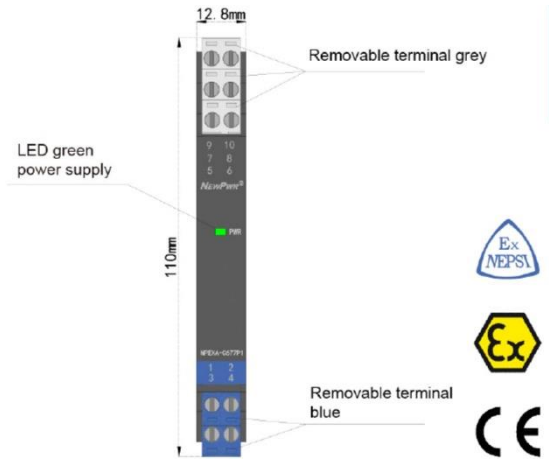

### Wiring Diagram

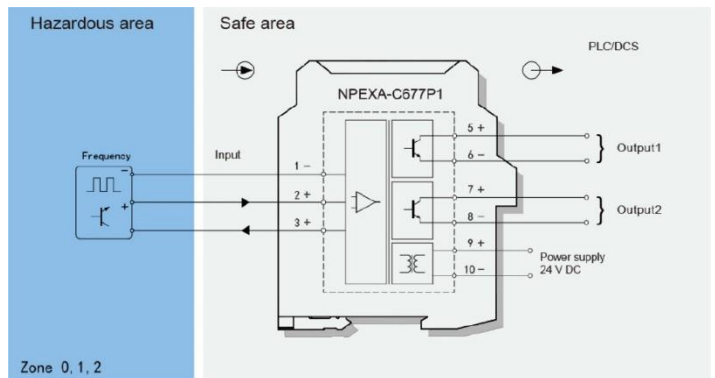

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation

(NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2)

Uo=8.7 V	Io=1 mA	Po=3 mW
IIC	Co= 5.9 μF	Lo= 1000 mH
IIB	Co= 35 μF	Lo= 1000 mH
IIA	Co= 700 μF	Lo= 1000 mH

Certified Parameters (Terminals 1, 3)

Uo=15.8 V	Io=107 mA	Po=423 mW
IIC	Co= 0.478 μF	Lo= 3 mH
IIB	Co= 2.88 μF	Lo= 9 mH
IIA	Co= 11.6 μF	Lo= 24 mH

# Frequency Isolated Safety Barrier



## NPEXA-C67P2 NPEXA-C677P2

Single Input, Single Output  
Single Input, Double Output


Input: Frequency

Output: 1:1


This Isolated Safety Barrier converts the frequency signals from a hazardous area to a safe area by isolation. The input, output and power supply are galvanically isolated from each other.

### Parameters

<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)	
<b>Power Dissipation</b>	0.9 W (Single Output); 1.8 W (Double Output)	
<b>Input Signal</b>	Frequency	
<b>Frequency Range</b>	0.1Hz~100kHz	
<b>Pulse Width</b>	≥ 5μs	
<b>Switching Trigger Point</b>	Low Level: 0V~2V; High Level: 4V~30V	
<b>Distribution Voltage</b>	≥ 16V, when loaded with 20mA	
<b>Output Signal</b>	Open Collector	High Level: Vcc (≤ 30V)
		Low Level: ≤ 2V
	Emitter Follower	High Level: Vcc-2V
		Low Level: ≤ 0.5V
	Logic Level	High Level: 18V ≤ V <sub>H</sub> ≤ 24V
		Low Level: V <sub>L</sub> ≤ 2V
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1	
<b>Dielectric Strength</b>	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side)	
	≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)	
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)	
<b>Operation Temperature</b>	-20~60 °C	
<b>Storage Temperature</b>	-40~80 °C	
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)	

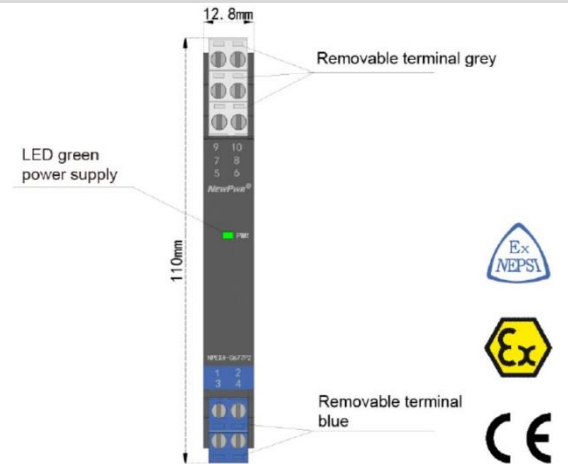

### Wiring Diagram

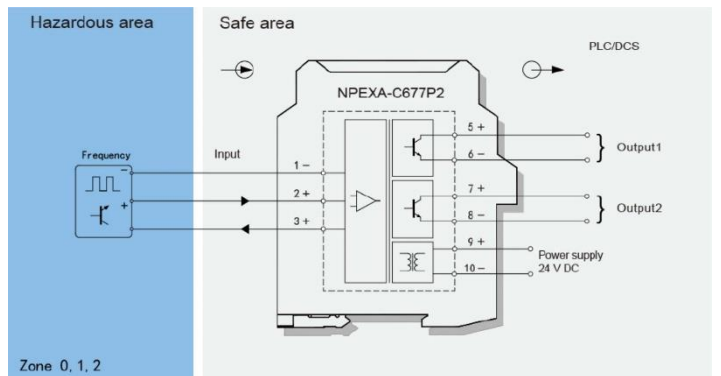

### Explosive-Proof Parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation

(NEPSI)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

Certified Parameters (Terminals 1, 2)

U<sub>0</sub>=8.7 V      I<sub>0</sub>=1 mA      P<sub>0</sub>=3 mW

IIC      C<sub>0</sub>= 5.9 μF      L<sub>0</sub>= 1000 mH

IIB      C<sub>0</sub>= 35 μF      L<sub>0</sub>= 1000 mH

IIA      C<sub>0</sub>= 700 μF      L<sub>0</sub>= 1000 mH

Certified Parameters (Terminals 1, 3)

U<sub>0</sub>=28 V      I<sub>0</sub>=93 mA      P<sub>0</sub>=651 mW

IIC      C<sub>0</sub>= 0.08 μF      L<sub>0</sub>= 4 mH

IIB      C<sub>0</sub>= 0.68 μF      L<sub>0</sub>= 12 mH

IIA      C<sub>0</sub>= 2.27 μF      L<sub>0</sub>= 32 mH

# RS485 Isolated Safety Barrier

## NPEXA-C711

Single Input, Single Output

Input: RS-485


Output: RS-485

This type of isolated safety barrier transmits RS-485 signals from a hazardous area to safe area, and provides isolated power supply for field devices. The input, output and power supply are galvanically isolated from each other.


### Parameters

<b>Power Supply</b>	18V DC~60V DC (Reverse Power Protection)
<b>Power Dissipation</b>	≤ 2W (Distribution: 8V / 9V / 12V, 50mA) ≤ 3.5W (Distribution: 5V / 6V, 100mA)
<b>Input Signal</b>	RS-485
<b>Control Mode</b>	Half-Duplex
<b>Output Signal</b>	RS-485
<b>Transmission Delay</b>	≤ 5μs
<b>Transmission Rate</b>	≤ 56 kbps
<b>Distribution Voltage</b>	Refer to Rotary Switch Setting
<b>Voltage Tolerance</b>	±10%
<b>Electromagnetic Compatibility</b>	IEC 61326-3-1
<b>Dielectric Strength</b>	≥3000VAC (Intrinsically Safe Side / Non-Intrinsically Safe Side) ≥1500VAC (Non-Intrinsically Safe Side / Non-Intrinsically Safe Side)
<b>Insulation Resistance</b>	≥100MΩ (Input / Output / Power Supply)
<b>Operation Temperature</b>	-20~60 °C
<b>Storage Temperature</b>	-40~80 °C
<b>Dimension (mm)</b>	12.8 (W) * 110 (H) * 117 (D)


### Rotary Switch Setting



Rotary Switch	Distribution
S0	5V DC, 100mA
S1	6V DC, 100mA
S2	8V DC, 50mA
S4	9V DC, 50mA
S8	12V DC, 50mA

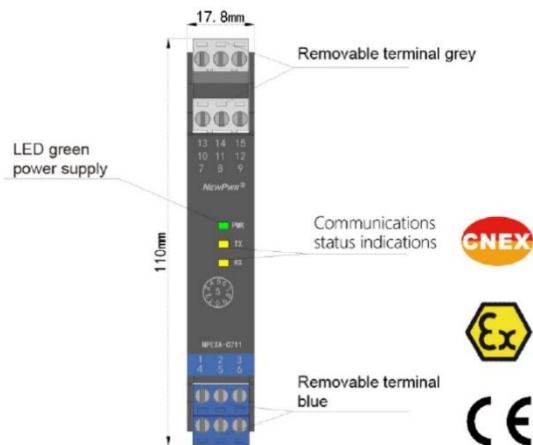

### Wiring Diagram

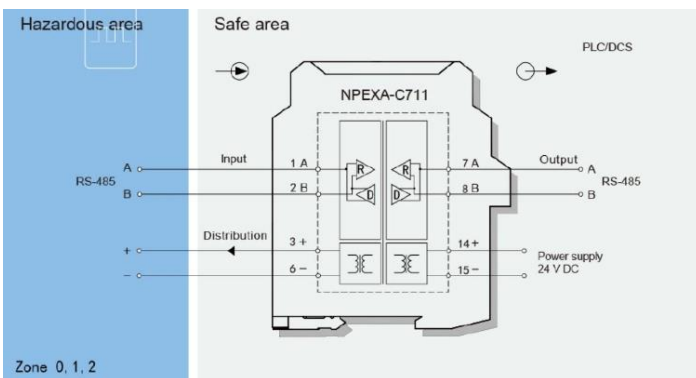

### Explosive-Proof Parameters

China National Quality Supervision & Test Centre for Explosion Protected Electrical Products (CQST)

Ex-Proof Grade: [Ex ia Ga] IIC

Um: 250V

#### Certified Parameters (Terminals 1, 2)

Uo=7.6 V	Io=77 mA	Po=147 mW
IIC Co= 7 μF	Lo=9 mH	
IIB Co= 112 μF	Lo=27 mH	
IIA Co= 700 μF	Lo=72 mH	

#### Certified Parameters (Terminals 3, 6)

Uo=23.1 V	Io=187 V	Po=1080 mW
IIC Co= 0.07 μF	Lo=1.6 mH	
IIB Co= 0.6 μF	Lo=4.8 mH	
IIA Co= 2.5 μF	Lo=12.8 mH	



## TOSILON AUTOMATION - NEWPWR

Focus security & stability on Industrial Measurement and Control Signals

### Xi'an Tosilon Automation Co., Ltd

- Address - No.299, Daqing Rd, Lianhu District, Xi'an Shaanxi, China
- Tel. - +86-29-8823 8550
- E-mail - [info@tosilon.com](mailto:info@tosilon.com)
- Website - [www.tosilon.com](http://www.tosilon.com)